

# WORKSTATION CATALOGUE



# 123

NSLAB

TECHNICAL/  
ESD/LAB  
FURNITURE



## ABOUT US

We at NS Lab have accumulated significant experience in electronics, microelectronics, laboratory facilities equipment and semiconductor industries markets, offering technologies, machines and furnishing, providing solutions, services and technical support.

Our workbenches are in use in almost every industry throughout the EU and Middle East. Technical, ESD and Lab furniture are our specialty for a number of environments from Universities and Biotech, to Semiconductor and Electronics Manufacturers.

NS LAB company specializes in the design and manufacture of workstations for laboratory, industrial and technical environments to maximize our customers productivity. We build ergonomic solutions that combine safety with industrial-grade reliability.

Technological innovations are dramatically changing the way we work today and the working environment is not immune to these changes.

We know there's no one-size-fits-all design when it comes to workstations and additional equipment. For years, we've been creating forward-thinking, modular equipment solutions designed to grow and evolve alongside your business.

1 0 1 00 011 0101

01 01010 1 11

# TABLE OF CONTENT

0101

1 01 0 1


01010 1 11

About us .....	4
OUR customers .....	6
AL Aluminium series workbenches .....	8
AG Argentum series workbenches .....	12
AU E Aurum Electric series workbenches.....	18
OS Osmium series workbenches .....	22
PT Platinum series workbenches .....	26
ZR Zirconium series workbenches .....	30
AG B and AG C basic workbenches .....	36
Drawer units .....	38
Movable tables and carts .....	40
Workplaces additional equipment .....	41
Cabinets and wardrobes .....	42



## MODULAR DESIGN

Thanks to our online configurator you can make the right choice among interchangeable units.



## ERGONOMICS AND FUNCTIONALITY

Proper ergonomics is vital for workplace comfort and healthy working environment. Working surfaces of the workstations are height/angle adjustable.



## 20+ YEARS IN BUSINESS

We aim to create solutions that meet the diverse needs of our customers. We have furnished thousands of different industrial enterprises from all over Europe and the MENA region.



### **5 YEAR WARRANTY\***

Our furniture has been successfully tested in extreme work environments.



### **FREE TECHNICAL SUPPORT**

Our goal is to bring an exceptional level of customer service and free technical support, design consultancy and 3D layouts.



### **COMPLIANCE WITH EN-61340-5-1:2009 ESD STANDARD**

We have extensive experience in developing, manufacturing and supplying ESD workstations, equipment and additional furnishing.


\*except bench tops (2 years) and lightings (warranty terms vary)

# OUR CUSTOMERS





The edge color of ESD version worktops and shelves is dark gray (RAL 7012).  
 The edge color of technical version worktops and shelves is light gray (RAL 7035).  
 Other edge colors are available on request.

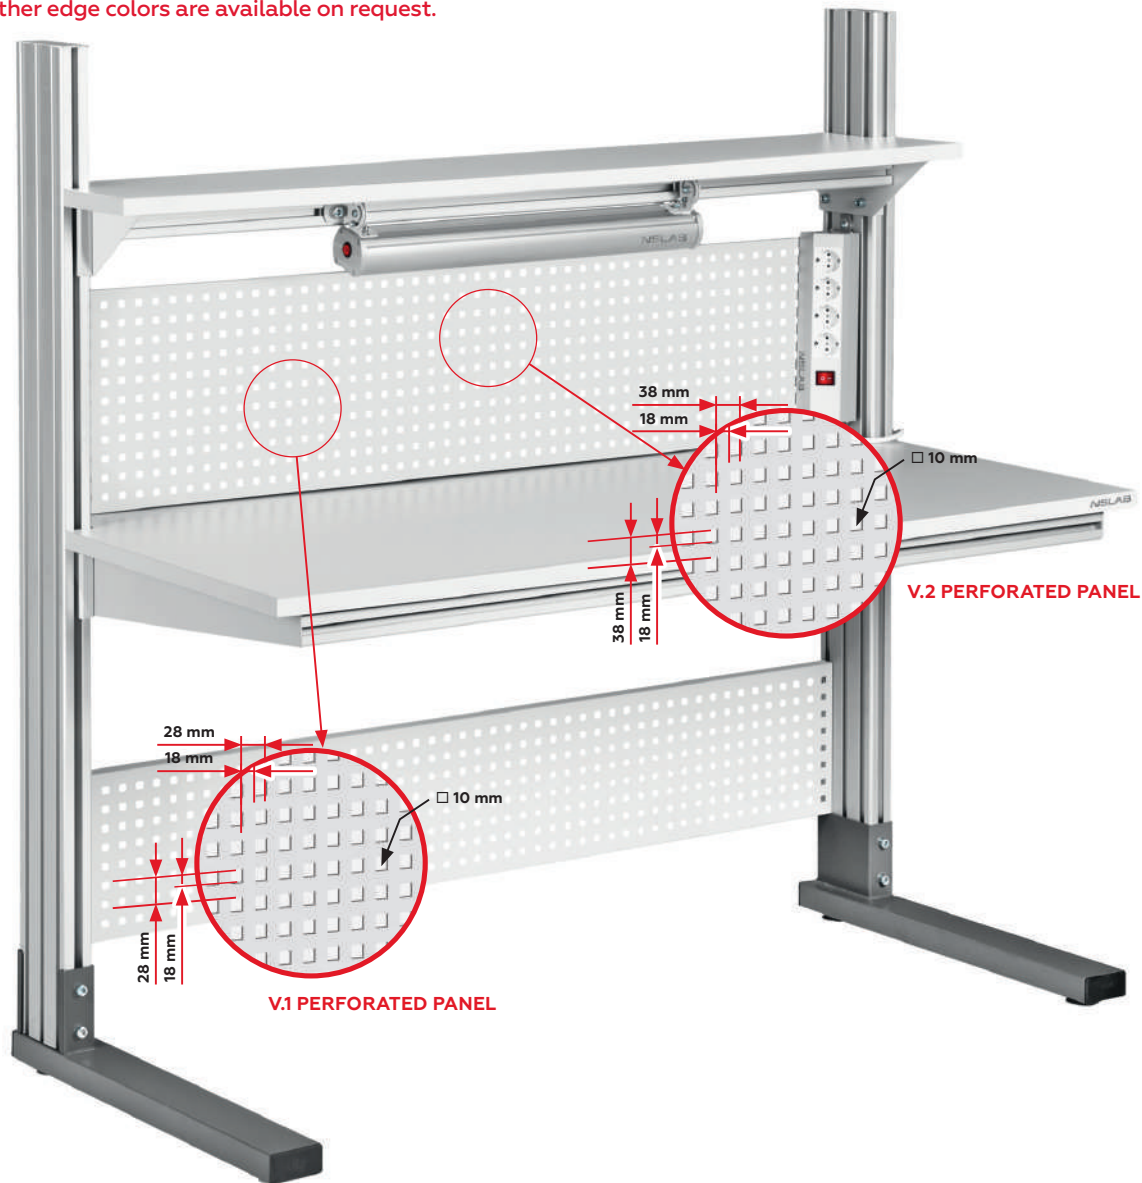

# AL ALUMINIUM SERIES WORKBENCHES



AL ALUMINIUM series workbenches with lateral aluminum frames are stylish and ergonomic workbenches that can perfectly equip various production, technical, and educational premises and educational facilities. ALUMINIUM series workbenches are distinguished by practical modular construction and compact size; they allow effective use of hall space.

We offer four models of AL series workbenches:

- single workbench,
- ALUMINIUM double workbench,
- simplified Basic workbench,
- T-shape simplified workbench.

Tabletop thickness 25 mm (tech), 26 (esd) mm.




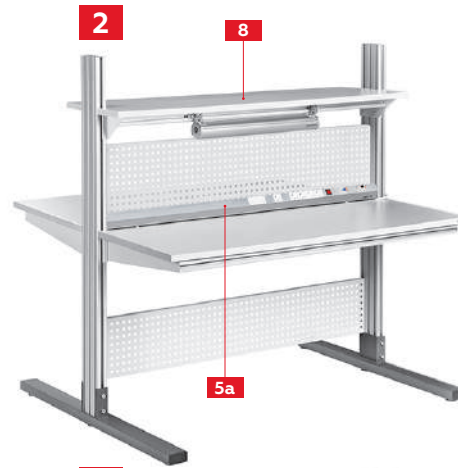
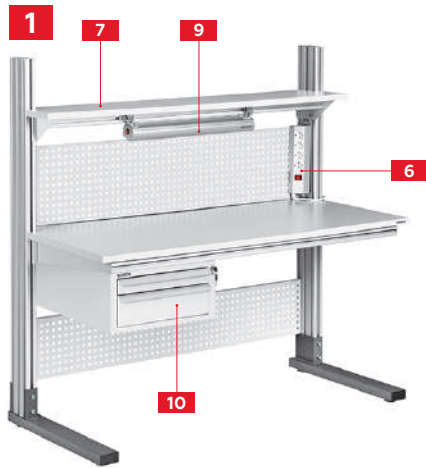


1 600-1100 mm 200 kg 300°C

2 600-1100 mm 200 kg 300°C




3 200 kg 300°C

4 200 kg 300°C

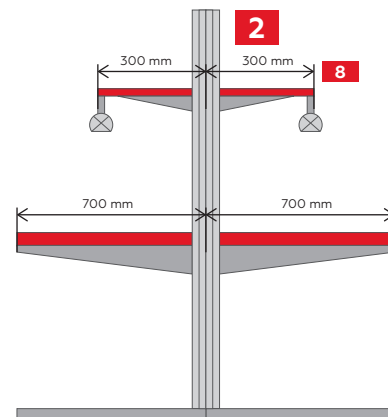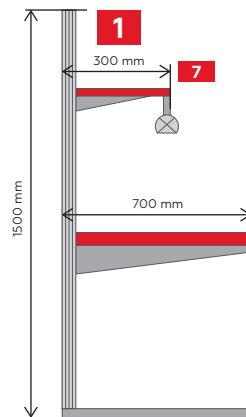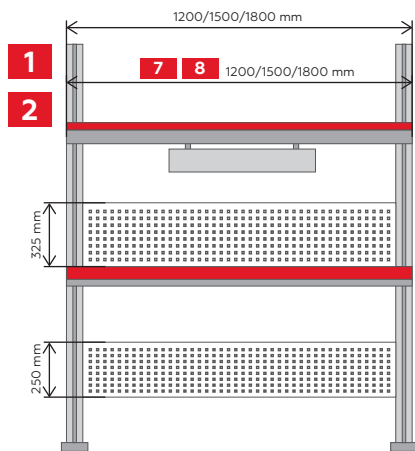

7 1200-1500 mm 50 kg

8 1200-1500 mm each side 50 kg

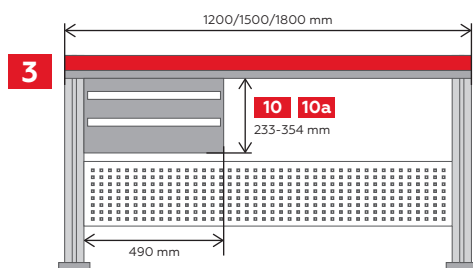

When placing an order, please choose either the ESD or technical version, and the colour, either dark grey RAL 7012 or light grey RAL 7035.

**1. SINGLE WORKBENCH**

Single workbench with lateral aluminum frames is supplied in a set with two perforated panels.

Code	Width	Type
NS.12.1.120.70.ESD	1200 mm	
NS.12.1.120.70	1200 mm	
NS.12.1.150.70.ESD	1500 mm	
NS.12.1.150.70	1500 mm	
NS.12.1.180.70.ESD	1800 mm	
NS.12.1.180.70	1800 mm	

**2. DOUBLE WORKBENCH**

Double-sided workbench with lateral aluminum frames is supplied in a set with two double perforated panels and two tabletops.

Code	Width	Type
NS.12.2.120.70.ESD	2x1200 mm	
NS.12.2.120.70	2x1200 mm	
NS.12.2.150.70.ESD	2x1500 mm	
NS.12.2.150.70	2x1500 mm	
NS.12.2.180.70.ESD	2x1800 mm	
NS.12.2.180.70	2x1800 mm	

**3. AL BASIC WORKBENCH**

Simplified ALUMINIUM series workbench without upper modules.

Code	Width	Type
NS.12.15.120.70.ESD	1200 mm	
NS.12.15.120.70	1200 mm	
NS.12.15.150.70.ESD	1500 mm	
NS.12.15.150.70	1500 mm	
NS.12.15.180.70.ESD	1800 mm	
NS.12.15.180.70	1800 mm	

**3.1. BOX WITH PROTECTIVE BRUSHES ON BOX LID'S EDGES**

Metal box with power panel is mounted to the back side of ALUMINIUM series universal workbench. The box's lid is covered with protective brushes to protect the power panel from dust and cuttings. Can also be used as a worktop extension, which increases the workbench depth by 180 mm. Power panel consists from 8 sockets in an aluminum case with protective contact and 3 m cable. Nominal load capacity: 10 A.

Available in technical and ESD versions.

Code	Width	Type
NS.12.16.120.ESD	1200 mm	
NS.12.16.120	1200 mm	
NS.12.16.150.ESD	1500 mm	
NS.12.16.150	1500 mm	
NS.12.16.180.ESD	1800 mm	
NS.12.16.180	1800 mm	

**4. T-SHAPED WORKBENCH**

Simplified ALUMINIUM series T-shaped workbench without the possibility of additional extensions.

Code	Width	Type
NS.12.17.120.80.ESD	1200 mm	
NS.12.17.120.80	1200 mm	
NS.12.17.150.80.ESD	1500 mm	
NS.12.17.150.80	1500 mm	
NS.12.17.180.80.ESD	1800 mm	
NS.12.17.180.80	1800 mm	

**5. POWER PANEL**

An aluminum case, protective contact, switch and 3 m cable. Can be equipped with additional sockets, fuses, phone jacks and earth leakage circuit breakers.

– Nominal load capacity: 10 A

Available with sockets matching all standards specific to Germany, UK, Czech republic, Switzerland, Italy, Israel and other countries on request.

**5A. DOUBLE POWER PANEL**

Two cases with four sockets, protective contact, switch and 3 m cable. Can be equipped with additional sockets, fuses, phone jacks and earth leakage circuit breakers.


– Nominal load capacity: 10 A

Available with sockets matching all standards specific to Germany, UK, Czech republic, Switzerland, Italy, Israel and other countries on request.

**6. SIDE POWER PANEL**

Four sockets with protective contact and 3 m cable in a small aluminum case. Side power panel can be mounted on any part of the lateral aluminum frame. No extension is possible.

Code	NS.12.12
------	----------

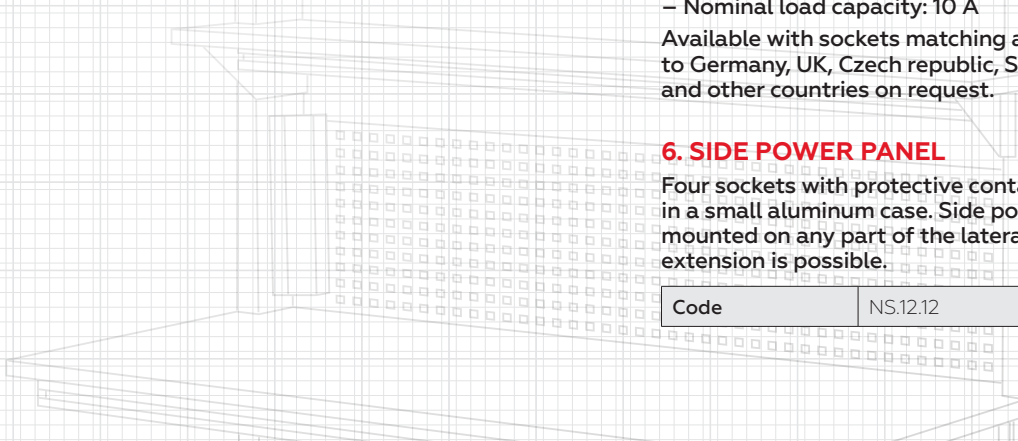

**7. MAIN SHELF**

Main shelf for ALUMINIUM series single workbenches.

Code	Shelf width	Version	Type
NS.12.3.120.30.ESD	1200 mm	single	
NS.12.3.120.30	1200 mm	single	
NS.12.3.150.30.ESD	1500 mm	single	
NS.12.3.150.30	1500 mm	single	
NS.12.3.180.30.ESD	1800 mm	single	
NS.12.3.180.30	1800 mm	single	

**8. DOUBLE MAIN SHELF**

Main shelf for ALUMINIUM series double workbenches. 1200-1500 mm each side 50 kg.

Code	Shelf width	Version	Type
NS.12.4.120.30.ESD	1200 mm	double	
NS.12.4.120.30	1200 mm	double	
NS.12.4.150.30.ESD	1500 mm	double	
NS.12.4.150.30	1500 mm	double	
NS.12.4.180.30.ESD	1800 mm	double	
NS.12.4.180.30	1800 mm	double	

**9. UNDER-SHELF LOCAL LED LIGHTING**

Additional lighting can be mounted under the main shelf or attached to perforated panel. Suitable for any workbench equipped with upper modules. Angle adjustment 80°.

- 2 versions: 60 cm length and 90 cm length
- Color temperature 4700-5300 K

Provides at least 1000-lux illuminance at 1000 mm distance from the light source. Also available with dimmer.

Code	Lighting width	Dimmer
NS.1.11	600 mm	-
NS.1.12	900 mm	-
NS.1.17	600 mm	+
NS.1.18	900 mm	+

**10. OPTIONAL DRAWER UNITS**

**10A. OPTIONAL DRAWER UNITS WITH REDUCED DEPTH**


Storage solution for tools and components, no place on floor required. Those with reduced depth of 490mm allow for the installation of various additional equipment under the tabletop.

Code	Quantity of drawers	Depth	Type	Color
NS.16.27.7012.ESD	3	full		
NS.16.27.7012	3	full		
NS.16.27.7035.ESD	3	full		
NS.16.27.7035	3	full		
NS.16.28.7012.ESD	2	full		
NS.16.28.7012	2	full		
NS.16.28.7035.ESD	2	full		
NS.16.28.7035	2	full		
NS.16.29.7012.ESD	3	reduced		
NS.16.29.7012	3	reduced		
NS.16.29.7035.ESD	3	reduced		
NS.16.29.7035	3	reduced		
NS.16.30.7012.ESD	2	reduced		
NS.16.30.7012	2	reduced		
NS.16.30.7035.ESD	2	reduced		
NS.16.30.7035	2	reduced		

**11. PERFORATED PANEL V.2**

Perforated panel v.2 with 38 mm feed pitch. Panel can be equipped with different holders for additional equipment and tools storage.

Code	Width
NS.12.7.120.EU	1200 mm
NS.12.7.150.EU	1500 mm
NS.12.7.180.EU	1800 mm

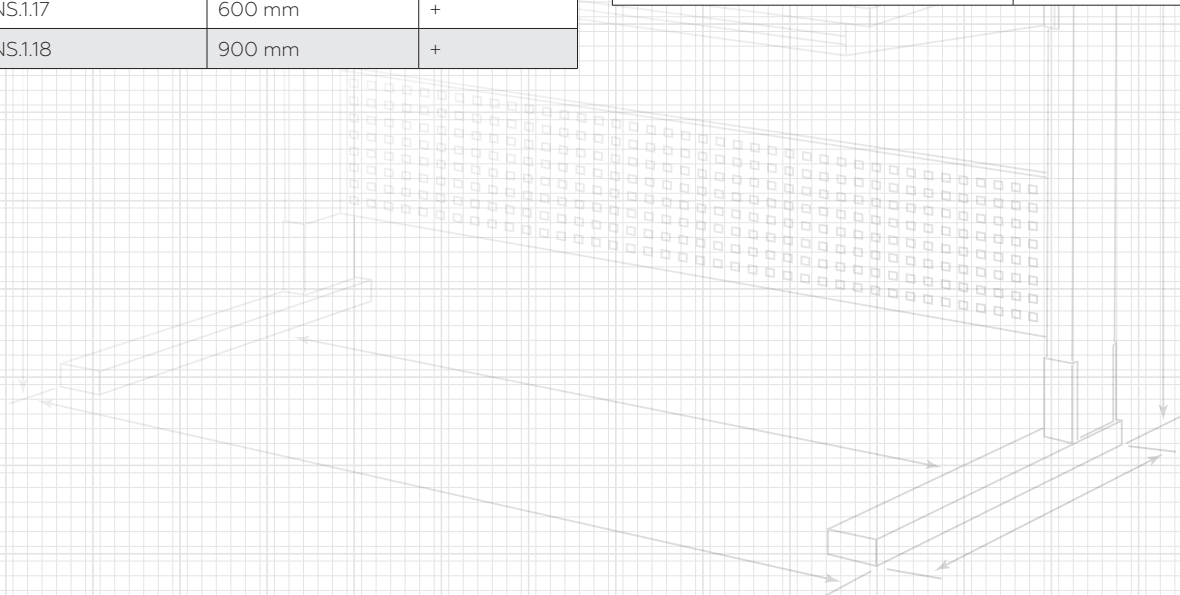




The edge color of ESD version worktops and shelves is dark gray (RAL 7012). The edge color of technical version worktops and shelves is light gray (RAL 7035). Other edge colors are available on request.

# AG ARGENTUM

## SERIES WORKBENCHES

These workbenches can be placed in a line to make a common working area with no gaps. Universal design allows fitting out the bench with additional equipment and drawer units.

- Tabletop thickness 25 mm (tech), 26 (esd) mm
- Height adjustment of the working surface – 650-900 mm
- Load capacity of the bench – 300 kg

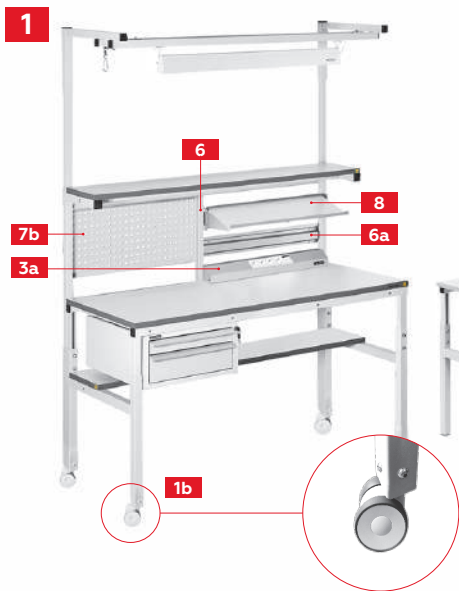



1 650–900 mm 300 kg 300°C

4 500-1350 mm from tabletop

8 534/684/834×295 mm 50 kg

8a 1111/1411/1711×295 mm 50 kg

11 675–890 mm 100/200 kg

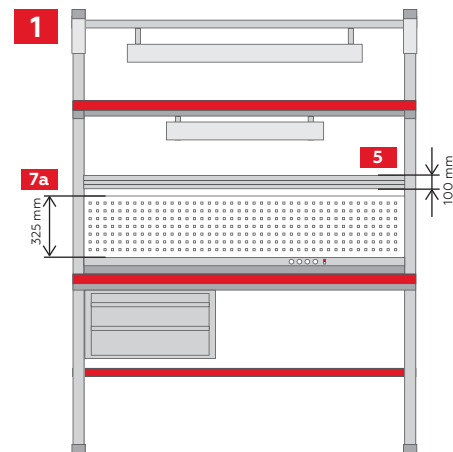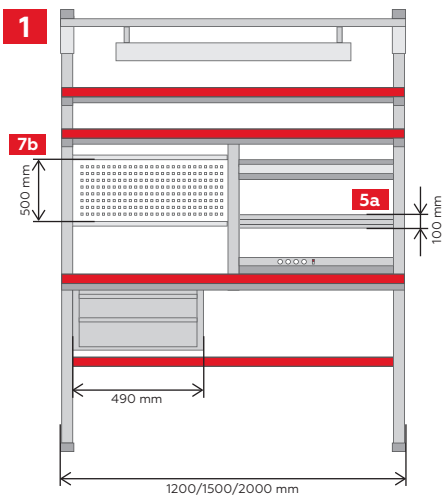



2, 2b 1000–1800 mm 50 kg 300/400 mm

5 1110/1410/1710×100 mm 10 kg

5a 530/680/830×100 mm 10 kg

7a 1190/1490/1790×325 mm 10 kg

7b 610/760/910×500 mm 10 kg

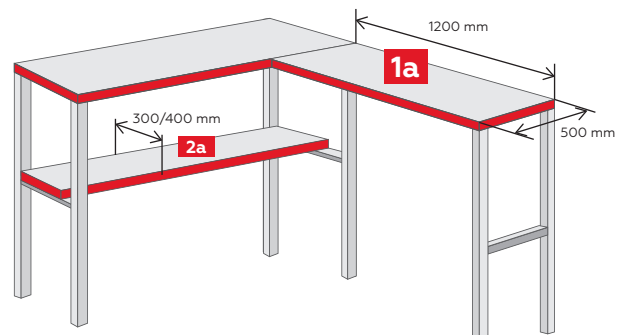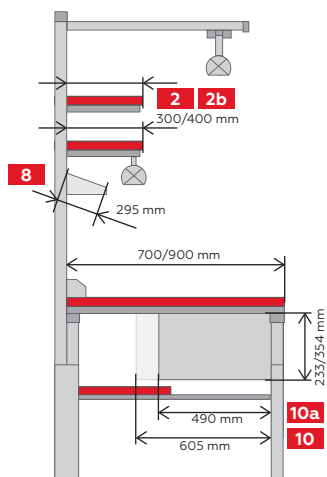

When placing an order, please choose either the ESD or technical version, and the colour, either dark grey RAL 7012 or light grey RAL 7035.

**1. ARGENTUM SERIE WORKBENCH**

These workbenches can be placed in line to create a gap-free common working area. Universal design allows fitting out the workplace with additional equipment and drawer units.

Code	Width	Depth	Color	Type
NS.5.1.120.70.7012.ESD	1200 mm	700 mm		
NS.5.1.120.70.7012	1200 mm	700 mm		
NS.5.1.120.70.7035.ESD	1200 mm	700 mm		
NS.5.1.120.70.7035	1200 mm	700 mm		
NS.5.1.150.70.7012	1500 mm	700 mm		
NS.5.1.150.70.7035.ESD	1500 mm	700 mm		
NS.5.1.150.70.7035	1500 mm	700 mm		
NS.5.1.150.70.7012.ESD	1500 mm	700 mm		
NS.5.1.180.70.7012.ESD	1800 mm	700 mm		
NS.5.1.180.70.7012	1800 mm	700 mm		
NS.5.1.180.70.7035.ESD	1800 mm	700 mm		
NS.5.1.180.70.7035	1800 mm	700 mm		
NS.5.3.120.90.7012	1200 mm	900 mm		
NS.5.3.120.90.7035.ESD	1200 mm	900 mm		
NS.5.3.120.90.7035	1200 mm	900 mm		
NS.5.3.120.90.7012.ESD	1200 mm	900 mm		
NS.5.3.150.90.7012	1500 mm	900 mm		
NS.5.3.150.90.7035.ESD	1500 mm	900 mm		
NS.5.3.150.90.7035	1500 mm	900 mm		
NS.5.3.150.90.7012.ESD	1500 mm	900 mm		
NS.5.3.180.90.7012	1800 mm	900 mm		
NS.5.3.180.90.7035.ESD	1800 mm	900 mm		
NS.5.3.180.90.7035	1800 mm	900 mm		
NS.5.3.180.90.7012.ESD	1800 mm	900 mm		

**1A. ARGENTUM SERIE CORNER WORKBENCH**

Additional side outlier for Argentum workbenches.

Code	Dimensions	Color	Type
NS.5.13.120.50.7035	1200x500 mm		
NS.5.13.120.50.7035.ESD	1200x500 mm		
NS.5.13.120.50.7012.ESD	1200x500 mm		
NS.5.13.120.50.7012	1200x500 mm		

**1B. WORKBENCH WHEELS SET**

Can be mounted to any Argentum workbench for mobility. Plug, swivel supports and wheels may be ordered separately.

Code	Item	Type
NS.1.38	plug	
NS.1.38.ESD	plug	
NS.1.39	swivel supports	
NS.1.53.ESD	wheels	
NS.1.53	wheels	

**2. MAIN SHELF**

Main shelf includes Rear racks.

Code	Shelf width	Wb depth	Color	Type
NS.1.24.120.30.7012.ESD	1200 mm	300 mm		
NS.1.24.120.30.7035.ESD	1200 mm	300 mm		
NS.1.24.120.30.7012	1200 mm	300 mm		
NS.1.24.120.30.7035	1200 mm	300 mm		
NS.1.24.150.30.7012.ESD	1500 mm	300 mm		
NS.1.24.150.30.7035.ESD	1500 mm	300 mm		
NS.1.24.150.30.7012	1500 mm	300 mm		
NS.1.24.150.30.7035	1500 mm	300 mm		
NS.1.24.180.30.7012.ESD	1800 mm	300 mm		
NS.1.24.180.30.7035.ESD	1800 mm	300 mm		
NS.1.24.180.30.7012	1800 mm	300 mm		
NS.1.24.180.30.7035	1800 mm	300 mm		
NS.1.25.120.40.7012.ESD	1200 mm	400 mm		
NS.1.25.120.40.7035.ESD	1200 mm	400 mm		
NS.1.25.120.40.7012	1200 mm	400 mm		
NS.1.25.120.40.7035	1200 mm	400 mm		
NS.1.25.150.40.7012.ESD	1500 mm	400 mm		
NS.1.25.150.40.7035.ESD	1500 mm	400 mm		
NS.1.25.150.40.7012	1500 mm	400 mm		
NS.1.25.150.40.7035	1500 mm	400 mm		
NS.1.25.180.40.7012.ESD	1800 mm	400 mm		
NS.1.25.180.40.7035.ESD	1800 mm	400 mm		
NS.1.25.180.40.7012	1800 mm	400 mm		
NS.1.25.180.40.7035	1800 mm	400 mm		

**2A. UNDERNEATH SHELF**


Not compatible with 3-drawers Optional drawer units.

Code	Shelf width	Wb depth	Color	Type
NS.128.120.30.7012.ESD	1200 mm	300 mm		
NS.128.120.30.7012	1200 mm	300 mm		
NS.128.120.30.7035.ESD	1200 mm	300 mm		
NS.128.120.30.7035	1200 mm	300 mm		
NS.128.150.30.7012.ESD	1500 mm	300 mm		
NS.128.150.30.7012	1500 mm	300 mm		
NS.128.150.30.7035.ESD	1500 mm	300 mm		
NS.128.150.30.7035	1500 mm	300 mm		
NS.128.180.30.7012.ESD	1800 mm	300 mm		
NS.128.180.30.7012	1800 mm	300 mm		
NS.128.180.30.7035.ESD	1800 mm	300 mm		
NS.128.180.30.7035	1800 mm	300 mm		
NS.129.120.40.7012.ESD	1200 mm	400 mm		
NS.129.120.40.7012	1200 mm	400 mm		
NS.129.120.40.7035.ESD	1200 mm	400 mm		
NS.129.120.40.7035	1200 mm	400 mm		
NS.129.150.40.7012.ESD	1500 mm	400 mm		
NS.129.150.40.7012	1500 mm	400 mm		
NS.129.150.40.7035.ESD	1500 mm	400 mm		
NS.129.150.40.7035	1500 mm	400 mm		
NS.129.180.40.7012.ESD	1800 mm	400 mm		
NS.129.180.40.7012	1800 mm	400 mm		
NS.129.180.40.7035.ESD	1800 mm	400 mm		
NS.129.180.40.7035	1800 mm	400 mm		

**2B. ADDITIONAL SHELF**

Main shelf includes Rear racks.

Code	Shelf width	Wb depth	Color	Type
NS.126.120.30.7012.ESD	1200 mm	300 mm		
NS.126.120.30.7012	1200 mm	300 mm		
NS.126.120.30.7035.ESD	1200 mm	300 mm		
NS.126.120.30.7035	1200 mm	300 mm		
NS.126.150.30.7012.ESD	1500 mm	300 mm		
NS.126.150.30.7012	1500 mm	300 mm		
NS.126.150.30.7035.ESD	1500 mm	300 mm		
NS.126.150.30.7035	1500 mm	300 mm		
NS.126.180.30.7012.ESD	1800 mm	300 mm		
NS.126.180.30.7012	1800 mm	300 mm		
NS.126.180.30.7035.ESD	1800 mm	300 mm		
NS.126.180.30.7035	1800 mm	300 mm		
NS.126.120.40.7012.ESD	1200 mm	400 mm		
NS.126.120.40.7012	1200 mm	400 mm		
NS.126.120.40.7035.ESD	1200 mm	400 mm		
NS.126.120.40.7035	1200 mm	400 mm		
NS.126.150.40.7012.ESD	1500 mm	400 mm		
NS.126.150.40.7012	1500 mm	400 mm		
NS.126.150.40.7035.ESD	1500 mm	400 mm		
NS.126.150.40.7035	1500 mm	400 mm		
NS.126.180.40.7012.ESD	1800 mm	400 mm		
NS.126.180.40.7012	1800 mm	400 mm		
NS.126.180.40.7035.ESD	1800 mm	400 mm		
NS.126.180.40.7035	1800 mm	400 mm		

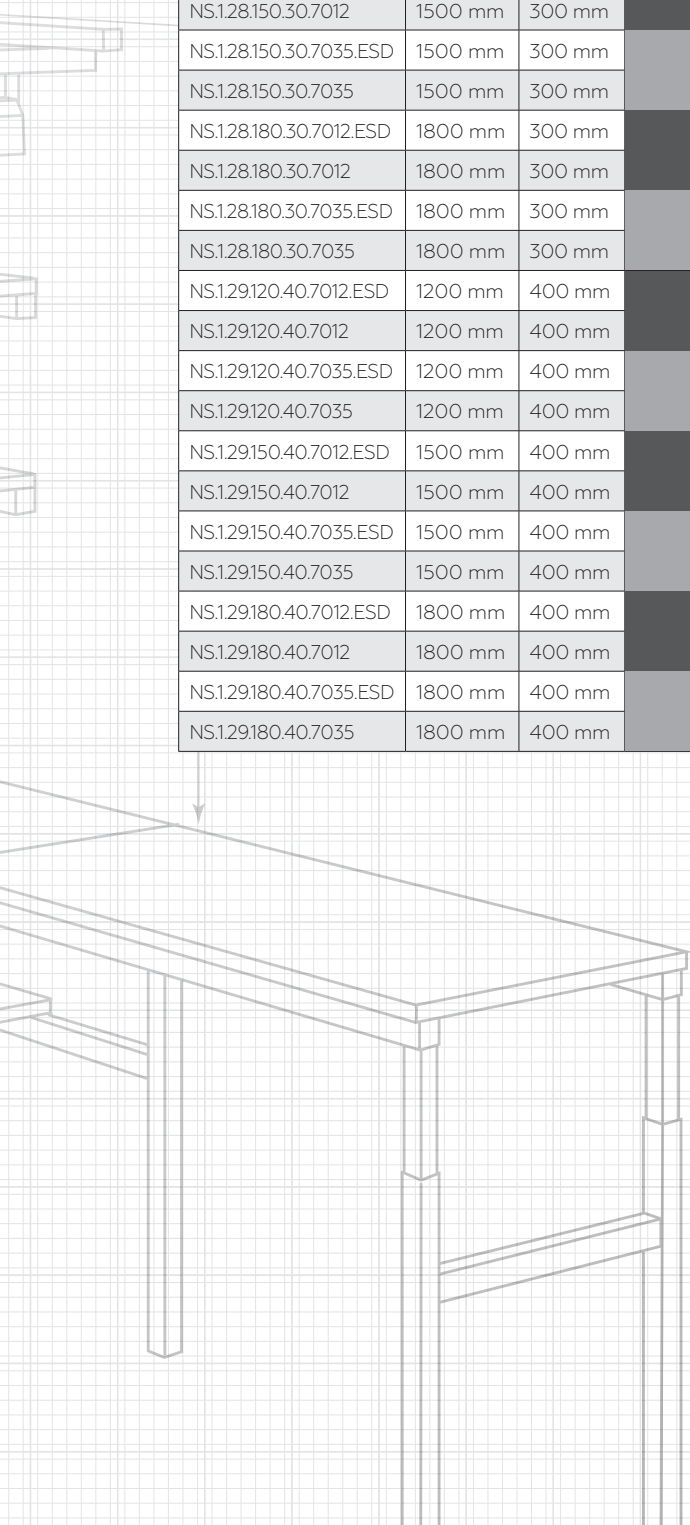

**3. POWER PANEL**

**3A. HALF-SIZE POWER PANEL**

An aluminum case/ half-size case with four sockets, protective contact, switch and 3 m cable. Can be equipped with additional sockets, fuses, phone jacks and earth leakage circuit breakers.

Available with sockets matching all standards specific to Germany, UK, Czech republic, Switzerland, Italy, Israel and other countries on request.

**4. WORKBENCH LED LIGHTING**

An aluminum case with LED lamp and light direction regulation. Color temperature 4700-5300 K. Provides at least 1200-lux illuminance at 1000 mm distance from the light source. 500-1350 mm from tabletop. Also available with dimmer.

Code	Width	Color
NS.114.120.7012	1200 mm	
NS.114.120.7035	1200 mm	
NS.114.150.7012	1500 mm	
NS.114.150.7035	1500 mm	
NS.114.180.7012	1800 mm	
NS.114.180.7035	1800 mm	

**4A. UNDER-SHELF LOCAL LIGHTING**

Additional lighting can be mounted under the main shelf or attached to perforated panel. Suitable for any workbench equipped with upper modules. Angle adjustment ±60°

- 2 versions: 60 cm length and 90 cm length
- Color temperature 4700–5300 K

Provides at least 1000-lux illuminance at 1000 mm distance from the light source. Also available with dimmer.

Code	Lighting width	Dimmer
NS.1.11	600 mm	-
NS.1.12	900 mm	-
NS.1.17	600 mm	+
NS.1.18	900 mm	+

**5. BIN RAIL**

**5A. HALF-SIZE BIN RAIL**

Aluminum rail for bin storage placed along workbench length.

Code	Wb width	Color	Size
NS.2.31.120.7012	1200 mm		full
NS.2.31.120.7035	1200 mm		full
NS.2.31.150.7012	1500 mm		full
NS.2.31.150.7035	1500 mm		full
NS.2.31.180.7012	1800 mm		full
NS.2.31.180.7035	1800 mm		full
NS.2.33.120.7012	1200 mm		half-size
NS.2.33.120.7035	1200 mm		half-size
NS.2.33.150.7012	1500 mm		half-size
NS.2.33.150.7035	1500 mm		half-size
NS.2.33.180.7012	1800 mm		half-size
NS.2.33.180.7035	1800 mm		half-size

**6. MIDDLE UPRIGHT, TECHNICAL UPRIGHTS FOR ALL ITEMS**

Required to hold any ½ item. Three sizes to match standard workbench width.

Code	Wb width	Color
NS.3.5.120.7012	1200 mm	
NS.3.5.120.7035	1200 mm	
NS.3.5.150.7012	1500 mm	
NS.3.5.150.7035	1500 mm	
NS.3.5.180.7012	1800 mm	
NS.3.5.180.7035	1800 mm	

**7A. PERFORATED PANEL HALF-SIZE**

Panel can be equipped with different holders for additional equipment and tools storage.

Code	Wb width	Color	Type
NS.3.6.120.7012	1200 mm		full
NS.3.6.120.7035	1200 mm		full
NS.3.6.150.7012	1500 mm		full
NS.3.6.150.7035	1500 mm		full
NS.3.6.180.7012	1800 mm		full
NS.3.6.180.7035	1800 mm		full
NS.3.7.120.7012	1200 mm		half-size
NS.3.7.120.7035	1200 mm		half-size
NS.3.7.150.7012	1500 mm		half-size
NS.3.7.150.7035	1500 mm		half-size
NS.3.7.180.7012	1800 mm		half-size
NS.3.7.180.7035	1800 mm		half-size

**7B. PERFORATED PANEL V.2**

Perforated panel v.2 with 38 mm feed pitch. Panel can be equipped with different holders for additional equipment and tools storage.

Code	Wb width	Color	Type
NS.3.9.120.7035.EU	1200 mm		full
NS.3.9.150.7035.EU	1500 mm		full
NS.3.9.180.7035.EU	1800 mm		full
NS.3.9.120.7012.EU	1200 mm		full
NS.3.9.150.7012.EU	1500 mm		full
NS.3.9.180.7012.EU	1800 mm		full
NS.3.10.120.7035.EU	1200 mm		half-size
NS.3.10.150.7035.EU	1500 mm		half-size
NS.3.10.180.7035.EU	1800 mm		half-size
NS.3.10.120.7012.EU	1200 mm		half-size
NS.3.10.150.7012.EU	1500 mm		half-size
NS.3.10.180.7012.EU	1800 mm		half-size



**8. SLOPED SHELF**

**8A. FULL-SIZE SLOPED SHELF**

Sloped shelf with 10-55° angle adjustment provides provides comfortable monitoring of work equipment.

Code	Width	Size	Type	Color
NS.1.36.120.7012.ESD	1200 mm	half-size		
NS.1.36.120.7012	1200 mm	half-size		
NS.1.36.120.7035.ESD	1200 mm	half-size		
NS.1.36.120.7035	1200 mm	half-size		
NS.1.36.150.7012.ESD	1500 mm	half-size		
NS.1.36.150.7012	1500 mm	half-size		
NS.1.36.150.7035.ESD	1500 mm	half-size		
NS.1.36.150.7035	1500 mm	half-size		
NS.1.36.180.7012.ESD	1800 mm	half-size		
NS.1.36.180.7012	1800 mm	half-size		
NS.1.36.180.7035.ESD	1800 mm	half-size		
NS.1.36.180.7035	1800 mm	half-size		
NS.1.37.120.7012.ESD	1200 mm	full-size		
NS.1.37.120.7012	1200 mm	full-size		
NS.1.37.120.7035.ESD	1200 mm	full-size		
NS.1.37.120.7035	1200 mm	full-size		
NS.1.37.150.7012.ESD	1500 mm	full-size		
NS.1.37.150.7012	1500 mm	full-size		
NS.1.37.150.7035.ESD	1500 mm	full-size		
NS.1.37.150.7035	1500 mm	full-size		
NS.1.37.180.7012.ESD	1800 mm	full-size		
NS.1.37.180.7012	1800 mm	full-size		
NS.1.37.180.7035.ESD	1800 mm	full-size		
NS.1.37.180.7035	1800 mm	full-size		

**9. IP CANTILEVER**

Upper slat for fastening drawings, additional lighting and instruments.

Code	Width	Color
NS.4.41.120.7012	1200 mm	
NS.4.41.120.7035	1200 mm	
NS.4.41.150.7012	1500 mm	
NS.4.41.150.7035	1500 mm	
NS.4.41.180.7012	1800 mm	
NS.4.41.180.7035	1800 mm	

**10. OPTIONAL DRAWER UNITS**

**10A. ADDITIONAL DRAWERS WITH REDUCED DEPTH**

Storage solution for tools and components, no floor space required. Those with reduced depth of 490 mm allow for the installation of various additional equipment under the tabletop. Drawer unit can be placed either on left or right side.

Code	Quantity of drawers	Depth	Type	Color
NS.16.27.7012.ESD	3	full		
NS.16.27.7012	3	full		
NS.16.27.7035.ESD	3	full		
NS.16.27.7035	3	full		
NS.16.28.7012.ESD	2	full		
NS.16.28.7012	2	full		
NS.16.28.7035.ESD	2	full		
NS.16.28.7035	2	full		
NS.16.29.7012.ESD	3	reduced		
NS.16.29.7012	3	reduced		
NS.16.29.7035.ESD	3	reduced		
NS.16.29.7035	3	reduced		
NS.16.30.7012.ESD	2	reduced		
NS.16.30.7012	2	reduced		
NS.16.30.7035.ESD	2	reduced		
NS.16.30.7035	2	reduced		

**11. CORNER CONNECTING WORKBENCH**

Corner connecting workbench is used to build up inseparable working area being a connector for two standard Argentum or Zirconium workbenches put at right angle. Increased depth of tabletop and load capacity of up to 200 kg (for 700 mm tables) allows storing and using heavy or bulky equipment.

Corner connecting workbench is produced in 2 sizes to match 700 mm deep workbenches and 900 mm deep workbenches. Perforated panel, main and additional shelves, lighting units and power panels can be mounted to corner connecting workbench on request.

Code	Size	Type	Color
NS.5.15.70.105.7035.ESD	700x1050 mm		
NS.5.15.70.105.7012.ESD	700x1050 mm		
NS.5.15.70.105.7035	700x1050 mm		
NS.5.15.70.105.7012	700x1050 mm		
NS.5.16.90.125.7035.ESD	900x1250 mm		
NS.5.16.90.125.7012.ESD	900x1250 mm		
NS.5.16.90.125.7035	900x1250 mm		
NS.5.16.90.125.7012	900x1250 mm		

The edge color of ESD version worktops and shelves is dark gray (RAL 7012). The edge color of technical version worktops and shelves is light gray (RAL 7035). Other edge colors are available on request.








# AURUM ELECTRIC

## SERIES WORKBENCHES

Aurum Electric workbenches are equipped with high-power, quick and silent electric actuators to adjust the height of the tabletop.

This ergonomic sit-stand workstation perfectly supports any ergonomic requirements of the operator in assembly work, R&D and industrial applications.

The workbench withstands high loads and is stable at all heights.

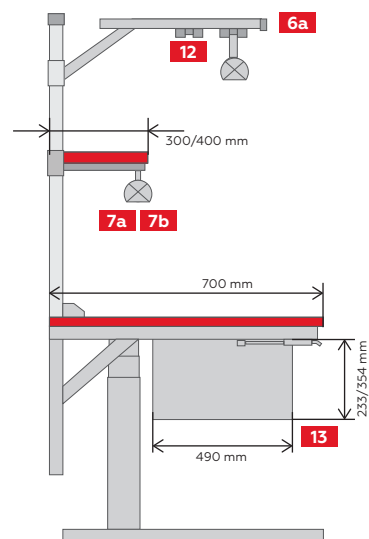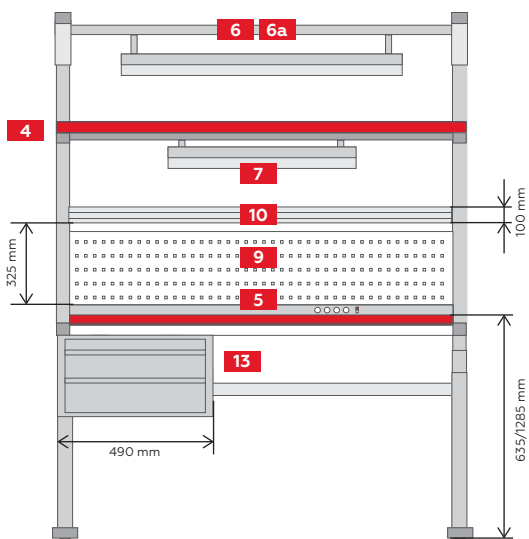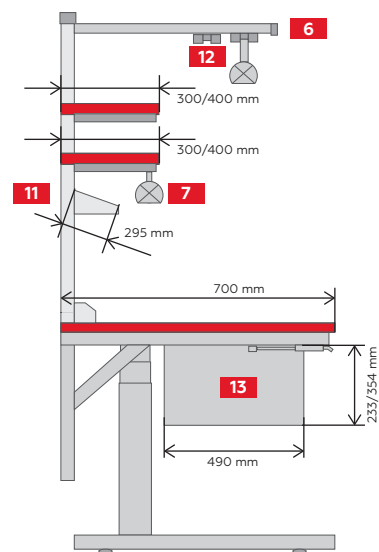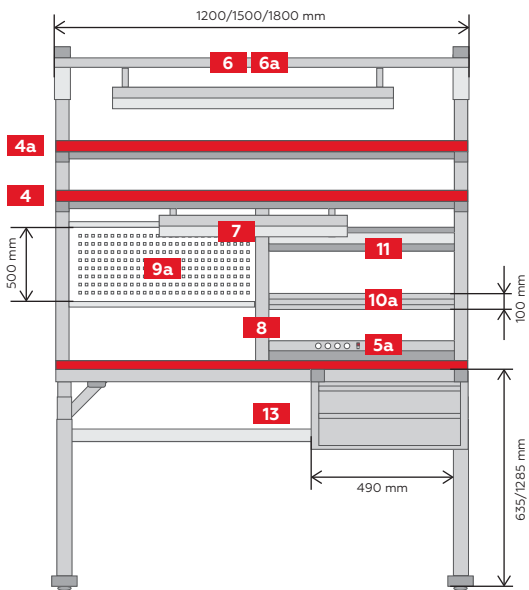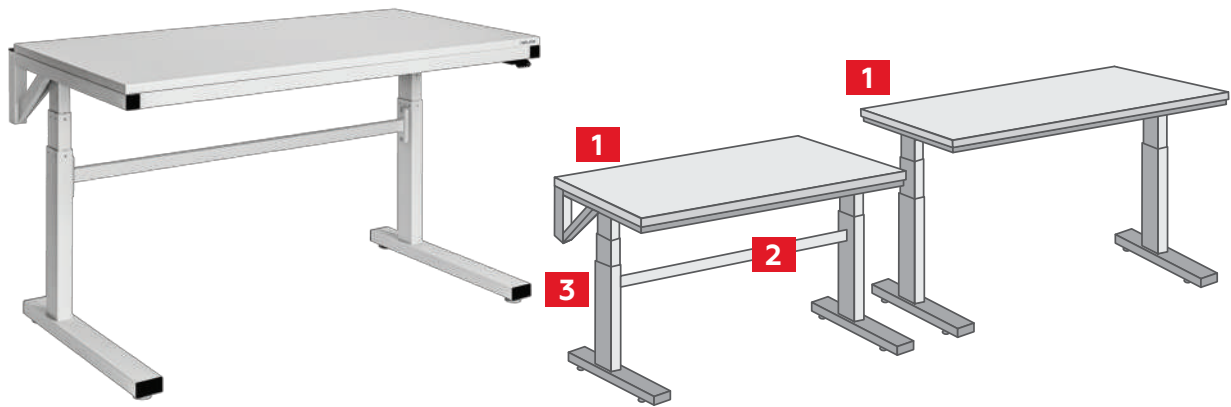

**1. AURUM ELECTRIC WORKBENCH**

Aurum Electric workbenches are equipped with high power quick and silent electric actuators to adjust the height of the tabletop.

- Max. speed 38mm/s unloaded.
- Stroke length – 650 mm.
- Duty cycle: 10% ~ 2 minutes of continuous use at full load, followed by 18 minutes of pause.

The workbench is supplied with Desk panel and Desk control application.

The Desk Panel DPG1M is a compact desk panel in the DPG series. It features Bluetooth® connection, two favorite positions and reminds the worker to use their sit-stand desks. The DPG1M is activated by tilting the desk panel in the same direction as the desk is intended to drive.

The Desk Control™ App is developed for users of sit-stand desks. The app allows the workers to connect to their desks via Bluetooth® wireless technology and reminds the user to use their sit-stand desks.

Code	Size	Color	Type
NS.10.5.120.70.7035.ESD	1200x700 mm		
NS.10.5.120.70.7035	1200x700 mm		
NS.10.5.150.70.7035.ESD	1500x700 mm		
NS.10.5.150.70.7035	1500x700 mm		
NS.10.5.180.70.7035.ESD	1800x700 mm		
NS.10.5.180.70.7035	1800x700 mm		

**2. REINFORCING CROSSBAR**

Reinforcing crossbar for additional rigidity of workbench.

Code	For workbench size	Color
NS.10.8.120.7035	1200x700 mm	
NS.10.8.150.7035	1500x700 mm	
NS.10.8.180.7035	1800x700 mm	

**3. REAR RACK HOLDERS NS.10.6.7035**

Additional holders for rear racks allowing assembly of upper extensions.

**4. MAIN SHELF**

Rear racks included.

Code	Width	Depth	Color	Type
NS.1.24.120.40.7035.ESD	1200 mm	300 mm		
NS.1.24.120.40.7035	1200 mm	300 mm		
NS.1.24.150.40.7035.ESD	1500 mm	300 mm		
NS.1.24.150.40.7035	1500 mm	300 mm		
NS.1.24.180.40.7035.ESD	1800 mm	300 mm		
NS.1.24.180.40.7035	1800 mm	300 mm		
NS.1.25.120.40.7035.ESD	1200 mm	400 mm		
NS.1.25.120.40.7035	1200 mm	400 mm		
NS.1.25.150.40.7035.ESD	1500 mm	400 mm		
NS.1.25.150.40.7035	1500 mm	400 mm		
NS.1.25.180.40.7035.ESD	1800 mm	400 mm		
NS.1.25.180.40.7035	1800 mm	400 mm		

**4A. ADDITIONAL SHELF**

Requires Main shelf to be installed. Rear racks excluded.

Code	Width	Depth	Color	Type
NS.1.26.120.30.7035.ESD	1200 mm	300 mm		
NS.1.26.120.30.7035	1200 mm	300 mm		
NS.1.26.150.30.7035.ESD	1500 mm	300 mm		
NS.1.26.150.30.7035	1500 mm	300 mm		
NS.1.26.180.30.7035.ESD	1800 mm	300 mm		
NS.1.26.180.30.7035	1800 mm	300 mm		
NS.1.26.120.40.7035.ESD	1200 mm	400 mm		
NS.1.26.120.40.7035	1200 mm	400 mm		
NS.1.26.150.40.7035.ESD	1500 mm	400 mm		
NS.1.26.150.40.7035	1500 mm	400 mm		
NS.1.26.180.40.7035.ESD	1800 mm	400 mm		
NS.1.26.180.40.7035	1800 mm	400 mm		

**5. POWER PANEL / 5A. ½ POWER PANEL**

An aluminum case/ half-size case with four sockets, protective contact, switch and 3 m cable. Can be equipped with additional sockets, fuses, phone jacks and earth leakage circuit breakers.

– Nominal load capacity: 10 A

Available with sockets matching all standards specific to Germany, UK, Czech republic, Switzerland, Italy, Israel and other countries on request.

**6. LED LIGHTING V.1**

An aluminum case with LED lamp and light direction regulation. Color temperature 4700–5300 K Provides at least 1200-lux illuminance at 1000 mm distance from the light source. Attached to a L-shape holder.

Code	Width	Color
NS.1.14.120.7035	1200 mm	
NS.1.14.150.7035	1500 mm	
NS.1.14.180.7035	1800 mm	

**6A. LED LIGHTING V.2**

An aluminum case with LED lamp and light direction regulation. Color temperature 4700–5300 K Provides at least 1200-lux illuminance at 1000 mm distance from the light source. Attached to a V-shape holder.

Code	Width	Color
NS.1.15.120.7035	1200 mm	
NS.1.15.150.7035	1500 mm	
NS.1.15.180.7035	1800 mm	

**7. UNDER-SHELF LOCAL LIGHTING**

Additional lighting can be mounted under the main shelf or attached to the perforated panel. Suitable for any workbench equipped with upper modules. Angle adjustment 80. 2 versions: 60 cm length and 90 cm length.

Code	Lighting width	Dimmer
NS.1.11	600 mm	-
NS.1.12	900 mm	-
NS.1.17	600 mm	+
NS.1.18	900 mm	+

**8. MIDDLE UPRIGHT FOR ALL ITEMS**

Required to hold any item. Three sizes to match standard workbench width.

Code	Wb width	Color
NS.3.5.120.7035	1200 mm	
NS.3.5.150.7035	1500 mm	
NS.3.5.180.7035	1800 mm	

**9. PERFORATED PANEL V.1**

**9A. HALF-SIZE PERFORATED PANEL V.1**

Perforated panel v.2 with 28 mm feed pitch. Panel can be equipped with different holders for additional equipment and tools storage.

Code	Wb width	Color	Size
NS.3.6.120.7035	1200 mm		full
NS.3.6.150.7035	1500 mm		full
NS.3.6.180.7035	1800 mm		full
NS.3.7.120.7035	1200 mm		Half-size
NS.3.7.150.7035	1500 mm		Half-size
NS.3.7.180.7035	1800 mm		Half-size

**10. PERFORATED PANEL V.2**

**10A. HALF-SIZE PERFORATED PANEL V.1**

Perforated panel v.2 with 38 mm feed pitch. Panel can be equipped with different holders for additional equipment and tools storage.

Code	Wb width	Color	Size
NS.3.9.120.7035.EU	1200 mm		Full-size
NS.3.9.150.7035.EU	1500 mm		Full-size
NS.3.9.180.7035.EU	1800 mm		Full-size
NS.3.10.120.7035.EU	1200 mm		Half-size
NS.3.10.150.7035.EU	1500 mm		Half-size
NS.3.10.180.7035.EU	1800 mm		Half-size

**10. BIN RAIL**

**10A. HALF-SIZE BIN RAIL**

Aluminum rail for bin storage placed along workbench length.

Code	Wb width	Color	Size
NS.2.31.120.7035	1200 mm		full
NS.2.31.150.7035	1500 mm		full
NS.2.31.180.7035	1800 mm		full
NS.2.33.120.7035	1200 mm		Half-size
NS.2.33.150.7035	1500 mm		Half-size
NS.2.33.180.7035	1800 mm		Half-size

**11. HALF-SIZE / 11A. FULL-SIZE SLOPED SHELF**

Full-size/Half-sized shelf with 10-55° angle adjustment provides comfortable monitoring of work equipment .

Code	Width	Depth	Type	Color
NS.1.36.120.7035.ESD	1200 mm	Half-size		
NS.1.36.120.7035	1200 mm	Half-size		
NS.1.36.150.7035.ESD	1500 mm	Half-size		
NS.1.36.150.7035	1500 mm	Half-size		
NS.1.36.180.7035.ESD	1800 mm	Half-size		
NS.1.36.180.7035	1800 mm	Half-size		
NS.1.37.120.7035.ESD	1200 mm	Full-size		
NS.1.37.120.7035	1200 mm	Full-size		
NS.1.37.150.7035.ESD	1500 mm	Full-size		
NS.1.37.150.7035	1500 mm	Full-size		
NS.1.37.180.7035.ESD	1800 mm	Full-size		
NS.1.37.180.7035	1800 mm	Full-size		

**12. CANTILEVER**

Upper slat for fastening drawings, additional lighting and instruments.

Code	Width	Color
NS.4.41.120.7035	1200 mm	
NS.4.41.150.7035	1500 mm	
NS.4.41.180.7035	1800 mm	

**13. OPTIONAL DRAWER UNITS WITH REDUCED DEPTH**

Storage solution for tools and components with depth of 490 mm. Two- or three-drawer versions are available.

Code	Quantity of drawers	Depth	Type	Color
NS.16.29.7035.ESD	3	reduced		
NS.16.29.7035	3	reduced		
NS.16.30.7035.ESD	2	reduced		
NS.16.30.7035	2	reduced		

**14. THE DESK SENSOR™ 1 (DS1)**

The Desk Sensor™ 1 is a new Anti-Collision™ solution which can limit material damage to a desk or an object if a collision occurs during driving of the desk.

When placing an order, please choose either the ESD or technical version, and the colour, either dark grey RAL 7012 or light grey RAL 7035.

**15. 1/2 POWER PANEL FOR PLATINUM SERIES WORKBENCHES**

An aluminum case/ half-size case with four sockets and on/off switch. Can be equipped with additional sockets, circuit breaker, automatic fuse, USB charger and RJ 45 data sockets.

Type	Size
NS.11.38.120	1200 mm
NS.11.38.150	1500 mm
NS.11.38.180	1800 mm

The edge color of ESD version worktops and shelves is dark gray (RAL 7012)  
The edge color of technical version worktops and shelves is light gray (RAL 7035).  
Other edge colors are available on request.





# OS OSMIUM

## SERIES WORKBENCHES

Double-sided workbench includes open frame supports and work surface, thus allowing an effective use of space.



- 1 720-905 mm 300°C each side 300 kg
- 4 500-1350 mm from tabletop

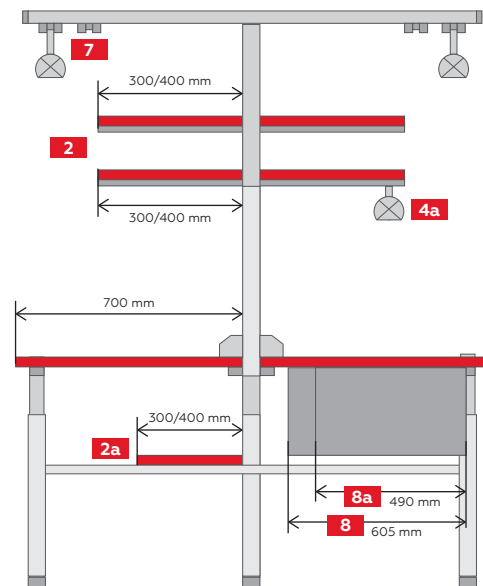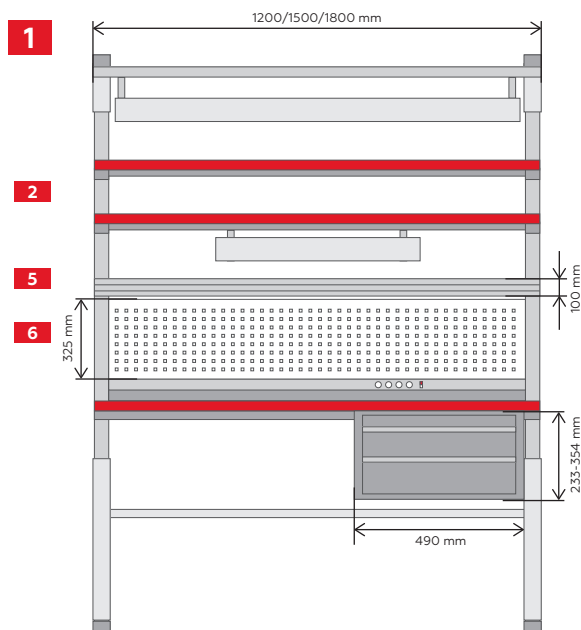

- 2 1100-1800 mm 300/400 mm
  - 2a 300/400 mm
  - 5 2x(1112/1412/1712)x100 mm
  - 6 2x(1112/1412/1712)x325 mm
- 50 kg

When placing an order, please choose either the ESD or technical version, and the colour, either dark grey RAL 7012 or light grey RAL 7035.

**1. OSMIUM SERIES WORKBENCH**

Basic configuration includes Rear racks and 300 mm shelves for each side of the workstation. Tabletop thickness 25 mm (tech), 26 (esd) mm.

Code	Width	Color	Type
NS.5.4.120.70.7012.ESD	2x1200 mm		
NS.5.4.120.70.7035.ESD	2x1200 mm		
NS.5.4.120.70.7012	2x1200 mm		
NS.5.4.120.70.7035	2x1200 mm		
NS.5.4.150.70.7012.ESD	2x1500 mm		
NS.5.4.150.70.7035.ESD	2x1500 mm		
NS.5.4.150.70.7012	2x1500 mm		
NS.5.4.150.70.7035	2x1500 mm		
NS.5.4.180.70.7012.ESD	2x1800 mm		
NS.5.4.180.70.7035.ESD	2x1800 mm		
NS.5.4.180.70.7012	2x1800 mm		
NS.5.4.180.70.7035	2x1800 mm		

**2. ADDITIONAL SHELF**

Should be mounted to Rear racks of the workbench.

Code	Shelf width	Wb depth	Color	Type
NS.1.30.120.30.7012.ESD	2x1200 mm	300 mm		
NS.1.30.120.30.7035.ESD	2x1200 mm	300 mm		
NS.1.30.120.30.7012	2x1200 mm	300 mm		
NS.1.30.120.30.7035	2x1200 mm	300 mm		
NS.1.30.150.30.7012.ESD	2x1500 mm	300 mm		
NS.1.30.150.30.7035.ESD	2x1500 mm	300 mm		
NS.1.30.150.30.7012	2x1500 mm	300 mm		
NS.1.30.150.30.7035	2x1500 mm	300 mm		
NS.1.30.180.30.7012.ESD	2x1800 mm	300 mm		
NS.1.30.180.30.7035.ESD	2x1800 mm	300 mm		
NS.1.30.180.30.7012	2x1800 mm	300 mm		
NS.1.30.180.30.7035	2x1800 mm	300 mm		
NS.1.30.120.40.7012.ESD	2x1200 mm	400 mm		
NS.1.30.120.40.7035.ESD	2x1200 mm	400 mm		
NS.1.30.120.40.7012	2x1200 mm	400 mm		
NS.1.30.120.40.7035	2x1200 mm	400 mm		
NS.1.30.150.40.7012.ESD	2x1500 mm	400 mm		
NS.1.30.150.40.7035.ESD	2x1500 mm	400 mm		
NS.1.30.150.40.7012	2x1500 mm	400 mm		
NS.1.30.150.40.7035	2x1500 mm	400 mm		
NS.1.30.180.40.7012.ESD	2x1800 mm	400 mm		
NS.1.30.180.40.7035.ESD	2x1800 mm	400 mm		
NS.1.30.180.40.7012	2x1800 mm	400 mm		
NS.1.30.180.40.7035	2x1800 mm	400 mm		

**2A. UNDERNEATH SHELF**

Not compatible with standard Optional drawer units.


Code	Shelf width	Wb depth	Color	Type
NS.1.28.120.30.7012.ESD	1200 mm	300 mm		
NS.1.28.120.30.7012	1200 mm	300 mm		
NS.1.28.120.30.7035.ESD	1200 mm	300 mm		
NS.1.28.120.30.7035	1200 mm	300 mm		
NS.1.28.150.30.7012.ESD	1500 mm	300 mm		
NS.1.28.150.30.7012	1500 mm	300 mm		
NS.1.28.150.30.7035.ESD	1500 mm	300 mm		
NS.1.28.150.30.7035	1500 mm	300 mm		
NS.1.28.180.30.7012.ESD	1800 mm	300 mm		
NS.1.28.180.30.7012	1800 mm	300 mm		
NS.1.28.180.30.7035.ESD	1800 mm	300 mm		
NS.1.28.180.30.7035	1800 mm	300 mm		
NS.1.29.120.40.7012.ESD	1200 mm	400 mm		
NS.1.29.120.40.7012	1200 mm	400 mm		
NS.1.29.120.40.7035.ESD	1200 mm	400 mm		
NS.1.29.120.40.7035	1200 mm	400 mm		
NS.1.29.150.40.7012.ESD	1500 mm	400 mm		
NS.1.29.150.40.7012	1500 mm	400 mm		
NS.1.29.150.40.7035.ESD	1500 mm	400 mm		
NS.1.29.150.40.7035	1500 mm	400 mm		
NS.1.29.180.40.7012.ESD	1800 mm	400 mm		
NS.1.29.180.40.7012	1800 mm	400 mm		
NS.1.29.180.40.7035.ESD	1800 mm	400 mm		
NS.1.29.180.40.7035	1800 mm	400 mm		

**3. DOUBLE POWER PANEL**

Two aluminum cases each with four sockets, protective contact, switch and 3 m cable. Can be equipped with additional sockets, fuses, phone jacks and earth leakage circuit breakers.

– Nominal load capacity: 10 A

Available with sockets matching all standards specific to Germany, UK, Czech republic, Switzerland, Italy, Israel and other countries on request.

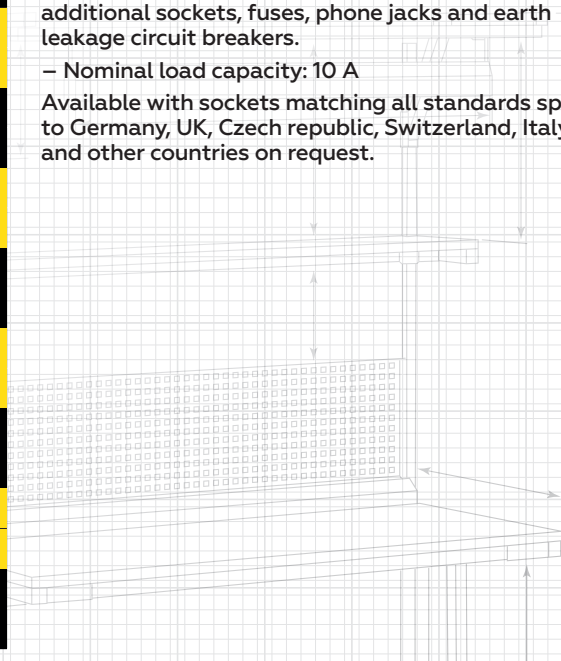



**4. DOUBLE WORKBENCH LED LIGHTING**

T-shape rack with two aluminum cases each with LED lamp and light direction regulation. Color temperature 4700-5300 K Provides at least 1200-lux illuminance at 1000 mm distance from the light source. 500-1350 from tabletop. Also available with dimmer.

Code	Width	Color
NS.1.16.120.7012	2x1200 mm	
NS.1.16.120.7035	2x1200 mm	
NS.1.16.150.7012	2x1500 mm	
NS.1.16.150.7035	2x1500 mm	
NS.1.16.180.7012	2x1800 mm	
NS.1.16.180.7035	2x1800 mm	

**4A. UNDER-SHELF LOCAL LIGHTING**

Additional lighting can be mounted under the main shelf or attached to perforated panel. Suitable for any workbench equipped with upper modules. Angle adjustment 80° – 2 versions: 60 cm length and 90 cm length – Color temperature 4700–5300 K. Provides at least 1000-lux illuminance at 1000 mm distance from the light source. Also available with dimmer.

Code	Lighting width	Dimmer
NS.1.11	600 mm	-
NS.1.12	900 mm	-
NS.1.17	600 mm	+
NS.1.18	900 mm	+

**5. DOUBLE BIN RAIL**

Double aluminum rail for storage bins is placed along workbench length.

Code	Wb width	Color
NS.2.32.120.7012	2x1200 mm	
NS.2.32.120.7035	2x1200 mm	
NS.2.32.150.7012	2x1500 mm	
NS.2.32.150.7035	2x1500 mm	
NS.2.32.180.7012	2x1800 mm	
NS.2.32.180.7035	2x1800 mm	

**6. DOUBLE PERFORATED PANEL V.1**

The panel can be equipped by different holders for additional equipment and tools storage.

Code	Wb width	Color
NS.3.8.120.7012	2x1200 mm	
NS.3.8.120.7035	2x1200 mm	
NS.3.8.150.7012	2x1500 mm	
NS.3.8.150.7035	2x1500 mm	
NS.3.8.180.7012	2x1800 mm	
NS.3.8.180.7035	2x1800 mm	

**6A. DOUBLE PERFORATED PANEL V.2**

Perforated panel v.2 with 38 mm feed pitch. Panel can be equipped with different holders for additional equipment and tools storage.

Code	Wb width	Color
NS.3.11.120.7035.EU	1200 mm	
NS.3.11.150.7035.EU	1500 mm	
NS.3.11.180.7035.EU	1800 mm	
NS.3.11.120.7012.EU	1200 mm	
NS.3.11.150.7012.EU	1500 mm	
NS.3.11.180.7012.EU	1800 mm	

**7. CANTILEVER**

















Upper slat for fastening drawings, additional lighting and instruments.

Code	Wb width	Color
NS.4.41.120.7012	1200 mm	
NS.4.41.120.7035	1200 mm	
NS.4.41.150.7012	1500 mm	
NS.4.41.150.7035	1500 mm	
NS.4.41.180.7012	1800 mm	
NS.4.41.180.7035	1800 mm	

**8. OPTIONAL DRAWER UNITS**

**8A. OPTIONAL DRAWER UNITS WITH REDUCED DEPTH**

Storage solution for tools and components, no place on floor required. Those with reduced to 490 mm depth allow installing various additional equipment under a tabletop. Drawer unit can be placed either on left or right side.

Code	Quantity of drawers	Depth	Type	Color
NS.16.27.7012.ESD	3	full		
NS.16.27.7012	3	full		
NS.16.27.7035.ESD	3	full		
NS.16.27.7035	3	full		
NS.16.28.7012.ESD	2	full		
NS.16.28.7012	2	full		
NS.16.28.7035.ESD	2	full		
NS.16.28.7035	2	full		
NS.16.29.7012.ESD	3	reduced		
NS.16.29.7012	3	reduced		
NS.16.29.7035.ESD	3	reduced		
NS.16.29.7035	3	reduced		
NS.16.30.7012.ESD	2	reduced		
NS.16.30.7012	2	reduced		
NS.16.30.7035.ESD	2	reduced		
NS.16.30.7035	2	reduced		


The edge color of ESD version worktops and shelves is dark gray (RAL 7012).  
The edge color of technical version worktops and shelves is light gray (RAL 7035).  
Other edge colors are available on request.





# PT PLATINUM

## SERIES WORKBENCHES

PLATINUM workbenches are distinguished by elegant design, advanced ergonomics and a convenient system of height adjustment. Several PLATINUM series workbenches can be placed in a continuous line where two tabletops are held by side lateral frames and share those in the middle. Standard PLATINUM workbenches are powder-coated in dark grey color (RAL 7012) for lower steel modules and light grey color (RAL 7035) for tabletops and shelves. Range of tabletop height adjustment: 600-1300 mm. Range of lighting height adjustment: 1200-2000 mm. Maximum height of lighting ramp – 2090 mm. Tabletop thickness 25 mm.

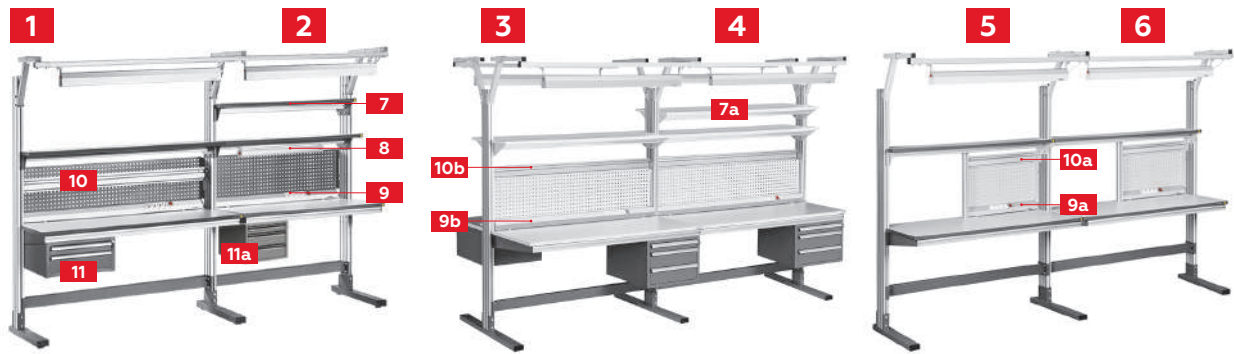

- 1-6 each tabletop 200 kg
- 7, 7a 1000-1850 mm 100 kg 300°C
- 10 1147/1447/1747×100 mm 10 kg
- 10a 547/697/847×100 mm 10 kg
- 10b 2×(1147/1447/1747)×100 mm 10 kg

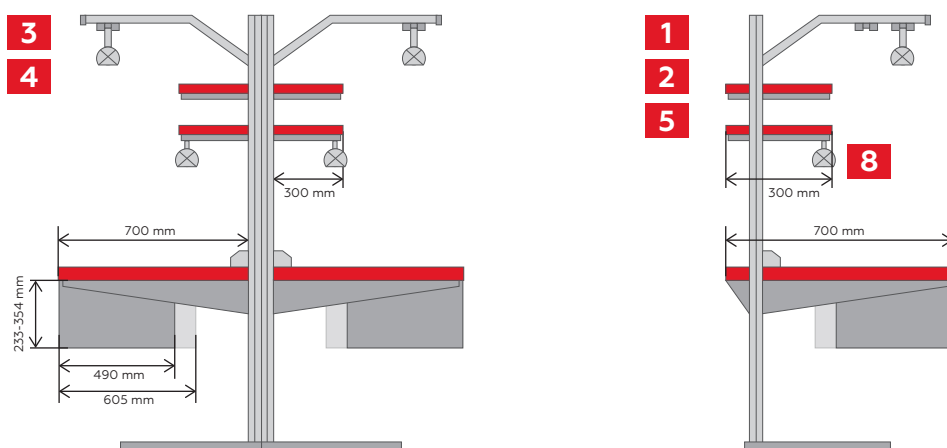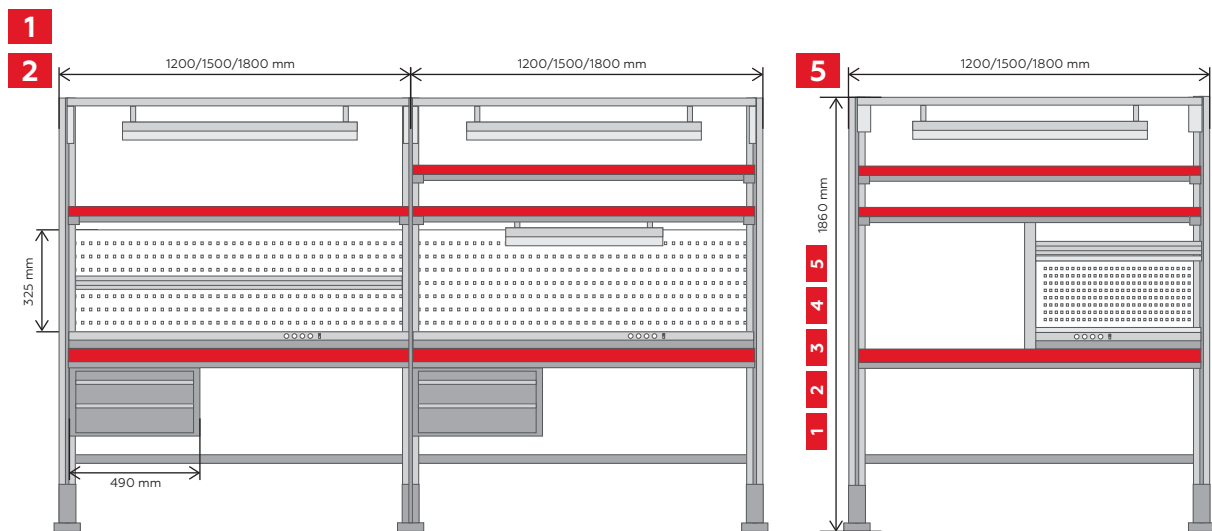

When placing an order, please choose either the ESD or technical version, and the colour, either dark grey RAL 7012 or light grey RAL 7035.

**1-2. PLATINUM SET / PLATINUM ADDITIONAL SET WITH LED LIGHTING**

Single workbench with two lateral aluminum frames. The workbench is supplied in a set with a lower cross bar perforated panel, main shelf and LED light unit. Additional set with one lateral aluminum frame is designed to be attached to main PLATINUM workbench from either side to create a gap-free working surface..

Code	Width	Version	Type
NS.11.3.120.70.ESD	1200 mm	Main set	
NS.11.3.120.70	1200 mm	Main set	
NS.11.3.150.70.ESD	1500 mm	Main set	
NS.11.3.150.70	1500 mm	Main set	
NS.11.3.180.70.ESD	1800 mm	Main set	
NS.11.3.180.70	1800 mm	Main set	
NS.11.7.120.70.ESD	1200 mm	Additional	
NS.11.7.120.70	1200 mm	Additional	
NS.11.7.150.70.ESD	1500 mm	Additional	
NS.11.7.150.70	1500 mm	Additional	
NS.11.7.180.70.ESD	1800 mm	Additional	
NS.11.7.180.70	1800 mm	Additional	

**3-4. PLATINUM DOUBLE SET WITH LED LIGHTING / PLATINUM ADDITIONAL DOUBLE SET WITH LED LIGHTING**

Double side workbench with two lateral aluminum frames. The workbench is supplied in a set with a double lower cross bar, double-sided perforated panel, double main shelf and two lighting units. Additional double side workbench with one lateral aluminum frame to be attached to main PLATINUM double workbench.

Code	Width	Version	Type
NS.11.11.120.70.ESD	1200 mm	Main set	
NS.11.11.120.70	1200 mm	Main set	
NS.11.11.150.70.ESD	1500 mm	Main set	
NS.11.11.150.70	1500 mm	Main set	
NS.11.11.180.70.ESD	1800 mm	Main set	
NS.11.11.180.70	1800 mm	Main set	
NS.11.15.120.70.ESD	1200 mm	Additional	
NS.11.15.120.70	1200 mm	Additional	
NS.11.15.150.70.ESD	1500 mm	Additional	
NS.11.15.150.70	1500 mm	Additional	
NS.11.15.180.70.ESD	1800 mm	Additional	
NS.11.15.180.70	1800 mm	Additional	

**5-6. PLATINUM SET (ADDITIONAL SET) WITH MIDDLE UPRIGHT AND LED LAMP**

Single workbench with two lateral aluminum frames. The workbench is supplied in a set with middle upright, half-size perforated panel, lower cross bar, main shelf and lighting. Additional set with one lateral aluminum frame is designed to be attached to main PLATINUM workbench from either side to create a gap-free working surface.

Code	Width	Version	Type
NS.11.19.120.70.ESD	1200 mm	Main set	
NS.11.19.120.70	1200 mm	Main set	
NS.11.19.150.70.ESD	1500 mm	Main set	
NS.11.19.150.70	1500 mm	Main set	
NS.11.19.180.70.ESD	1800 mm	Main set	
NS.11.19.180.70	1800 mm	Main set	
NS.11.23.120.70.ESD	1200 mm	Additional	
NS.11.23.120.70	1200 mm	Additional	
NS.11.23.150.70.ESD	1500 mm	Additional	
NS.11.23.150.70	1500 mm	Additional	
NS.11.23.180.70.ESD	1800 mm	Additional	
NS.11.23.180.70	1800 mm	Additional	

**7-7A. ADDITIONAL SHELF (DOUBLE SHELF)**

Code	Width	Depth	Type
NS.11.26.120.30.ESD	1200 mm	300 mm	
NS.11.26.120.30	1200 mm	300 mm	
NS.11.26.150.30.ESD	1500 mm	300 mm	
NS.11.26.150.30	1500 mm	300 mm	
NS.11.26.180.30.ESD	1800 mm	300 mm	
NS.11.26.180.30	1800 mm	300 mm	
NS.11.27.120.40.ESD	1200 mm	400 mm	
NS.11.27.120.40	1200 mm	400 mm	
NS.11.27.150.40.ESD	1500 mm	400 mm	
NS.11.27.150.40	1500 mm	400 mm	
NS.11.27.180.40.ESD	1800 mm	400 mm	
NS.11.27.180.40	1800 mm	400 mm	
NS.11.28.120.30.ESD	2x1200 mm	300 mm	
NS.11.28.120.30	2x1200 mm	300 mm	
NS.11.28.150.30.ESD	2x1500 mm	300 mm	
NS.11.28.150.30	2x1500 mm	300 mm	
NS.11.28.180.30.ESD	2x1800 mm	300 mm	
NS.11.28.180.30	2x1800 mm	300 mm	
NS.11.26.120.40.ESD	2x1200 mm	400 mm	
NS.11.28.120.40	2x1200 mm	400 mm	
NS.11.28.150.40.ESD	2x1500 mm	400 mm	
NS.11.28.150.40	2x1500 mm	400 mm	
NS.11.28.180.40.ESD	2x1800 mm	400 mm	
NS.11.28.180.40	2x1800 mm	400 mm	

**8. UNDER-SHELF LOCAL LED LIGHTING**

Additional lighting can be mounted under the main shelf or attached to perforated panel. Suitable for any workbench equipped with upper modules. Angle adjustment 80°.

- 2 versions: 60 cm length and 90 cm length
- Color temperature 4700-5300 K Provides at least 1000-lux illuminance at 1000 mm distance from the light source. Also available with dimmer.

Code	Lighting width	Dimmer
NS.1.11	600 mm	-
NS.1.12	900 mm	-
NS.1.17	600 mm	+
NS.1.18	900 mm	+

**9. POWER PANEL**

**9A. 1/2 POWER PANEL**

**9B. DOUBLE POWER PANEL**

An aluminum case/ two cases with four sockets, protective contact, switch and 3 m cable. Can be equipped with additional sockets, fuses, phone jacks and earth leakage circuit breakers.

- Nominal load capacity: 10 A

Available with sockets matching all standards specific to Germany, UK, Czech republic, Switzerland, Italy, Israel and other countries on request.

Code	Wb width	Size
NS.11.xy.120	1200 mm	1/2 power panel for Platinum series workbenches
NS.11.xy.150	1500 mm	1/2 power panel for Platinum series workbenches
NS.11.xy.180	1800 mm	1/2 power panel for Platinum series workbenches
NS.11.xy.120	1200 mm	Platinum series power panel
NS.11.xy.150	1500 mm	Platinum series power panel
NS.11.xy.180	1800 mm	Platinum series power panel

XY - means that final articles depend on chosen type of sockets.

**10. BIN RAIL**

**10A. 1/2 BIN RAIL**

**10B. DOUBLE BIN RAIL**

Aluminum rail for bin storage placed along workbench length.

Code	Wb width	Size
NS.11.29.120	1200 mm	full
NS.11.29.150	1500 mm	full
NS.11.29.180	1800 mm	full
NS.11.30.120	1200 mm	Half-size
NS.11.30.150	1500 mm	Half-size
NS.11.30.180	1800 mm	Half-size
NS.11.31.120	1200 mm	double
NS.11.31.150	1500 mm	double
NS.11.31.180	1800 mm	double

**11. OPTIONAL DRAWER UNITS**

**11A. OPTIONAL DRAWER UNITS WITH REDUCED DEPTH**

Storage solution for tools and components, no place on floor required. Those with reduced depth of 490 mm allow for the installation of various additional equipment under the tabletop.

Code	Quantity of drawers	Depth	Type	Color
NS.16.27.7012.ESD	3	full		
NS.16.27.7012	3	full		
NS.16.27.7035.ESD	3	full		
NS.16.27.7035	3	full		
NS.16.28.7012.ESD	2	full		
NS.16.28.7012	2	full		
NS.16.28.7035.ESD	2	full		
NS.16.28.7035	2	full		
NS.16.29.7012.ESD	3	reduced		
NS.16.29.7012	3	reduced		
NS.16.29.7035.ESD	3	reduced		
NS.16.29.7035	3	reduced		
NS.16.30.7012.ESD	2	reduced		
NS.16.30.7012	2	reduced		
NS.16.30.7035.ESD	2	reduced		
NS.16.30.7035	2	reduced		

**12. PERFORATED PANEL V.2**

Perforated panel v.2 with 38 mm feed pitch. Panel can be equipped with different holders for additional equipment and tools storage.

Code	Width	Type
NS.11.32.120.EU	1200 mm	Full-size single
NS.11.32.150.EU	1500 mm	Full-size single
NS.11.32.180.EU	1800 mm	Full-size single
NS.11.34.120.EU	1200 mm	Double
NS.11.34.150.EU	1500 mm	Double
NS.11.34.180.EU	1800 mm	Double
NS.11.33.120.EU	1200 mm	Half-size
NS.11.33.150.EU	1500 mm	Half-size
NS.11.33.180.EU	1800 mm	Half-size

**13. CANTILEVER**

Designed for easy-to-reach attachment of drawings, lighting and instruments.

Code	Width
NS.11.25.120	1200 mm
NS.11.25.150	1500 mm
NS.11.25.180	1800 mm



The edge color of ESD version worktops and shelves is dark gray (RAL 7012).  
The edge color of technical version worktops and shelves is light gray (RAL 7035).  
Other edge colors are available on request.



# ZR ZIRCONIUM



## SERIES WORKBENCHES

ZIRCONIUM series workbenches feature L-shaped metal side supports and can be equipped with a variety of optional modules to suit any application.

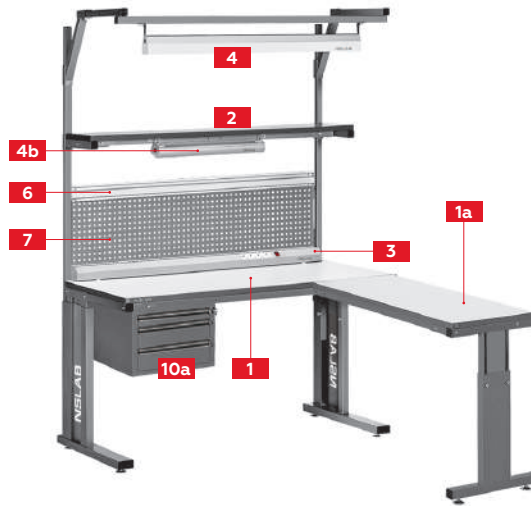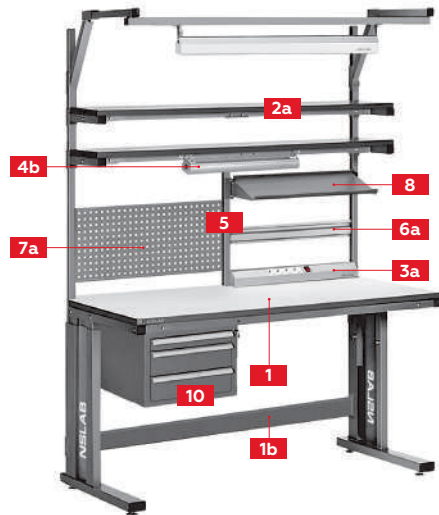


- 1 800-950 mm 200 kg 300°C
- 2, 2a 1000-1800 mm 50 kg 300/400 mm


- 4 500-1350 mm from tabletop

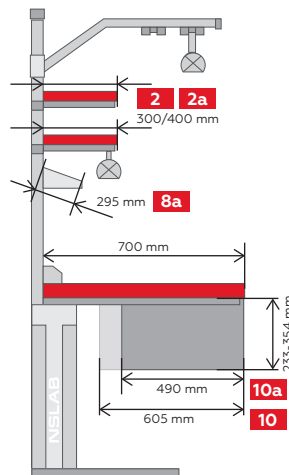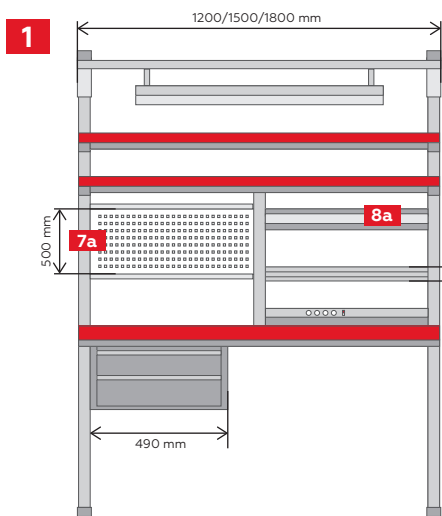

- 6 1110/1410/1710×100 mm
- 6a 530/680/830×100 mm
- 10 kg
- 7 1190/1490/1790×325 mm
- 7a 610/760/910×500 mm
- 10 kg

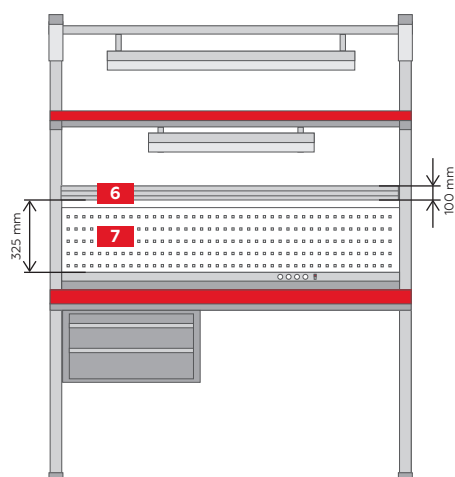

- 8 1111/1411/1711×295 mm 10 kg
- 8a 534/684/834×295 mm

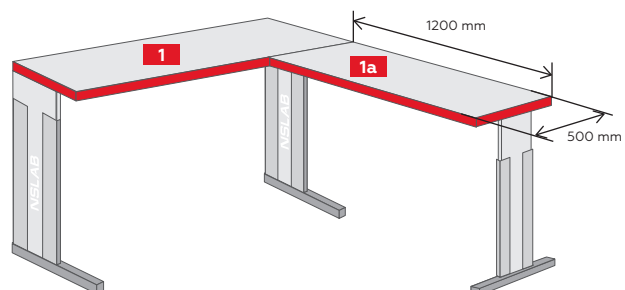

When placing an order, please choose either the ESD or technical version, and the colour, either dark grey RAL 7012 or light grey RAL 7035.

**1. ZIRCONIUM SERIES WORKBENCH WITH L-SHAPE METAL SIDE SUPPORTS**

Tabletop thickness 25 mm.

Code	Width	Type	Color
NS.5.2.120.70.7012.ESD	1200 mm		
NS.5.2.120.70.7035.ESD	1200 mm		
NS.5.2.120.70.7012	1200 mm		
NS.5.2.120.70.7035	1200 mm		
NS.5.2.150.70.7012.ESD	1500 mm		
NS.5.2.150.70.7035.ESD	1500 mm		
NS.5.2.150.70.7012	1500 mm		
NS.5.2.150.70.7035	1500 mm		
NS.5.2.180.70.7012.ESD	1800 mm		
NS.5.2.180.70.7035.ESD	1800 mm		
NS.5.2.180.70.7012	1800 mm		
NS.5.2.180.70.7035	1800 mm		

**1A. ZIRCONIUM SERIES CORNER WORKBENCH**

Additional side outlier for ZR workbenches.

Code	Color	Type
NS.5.14.120.50.7012.ESD		
NS.5.14.120.50.7035.ESD		
NS.5.14.120.50.7012		
NS.5.14.120.50.7035		

**1B. ADDITIONAL LOWER CROSSBAR**


Provides extended stability and rigidity of the workbench.

Code	Width	Color
NS.3.1.120.7035	1200 mm	
NS.3.1.120.7012	1200 mm	
NS.3.1.150.7035	1500 mm	
NS.3.1.150.7012	1500 mm	
NS.3.1.180.7035	1800 mm	
NS.3.1.180.7012	1800 mm	

**2. MAIN SHELF**

Rear racks included.

Code	Shelf width	Wb depth	Color	Type
NS.1.24.120.40.7012.ESD	1200 mm	300 mm		
NS.1.24.120.40.7012	1200 mm	300 mm		
NS.1.24.120.40.7035.ESD	1200 mm	300 mm		
NS.1.24.120.40.7035	1200 mm	300 mm		
NS.1.24.150.40.7012.ESD	1500 mm	300 mm		
NS.1.24.150.40.7012	1500 mm	300 mm		
NS.1.24.150.40.7035.ESD	1500 mm	300 mm		
NS.1.24.150.40.7035	1500 mm	300 mm		
NS.1.24.180.40.7012.ESD	1800 mm	300 mm		
NS.1.24.180.40.7012	1800 mm	300 mm		
NS.1.24.180.40.7035.ESD	1800 mm	300 mm		
NS.1.24.180.40.7035	1800 mm	300 mm		
NS.1.25.120.40.7012.ESD	1200 mm	400 mm		
NS.1.25.120.40.7012	1200 mm	400 mm		
NS.1.25.120.40.7035.ESD	1200 mm	400 mm		
NS.1.25.120.40.7035	1200 mm	400 mm		
NS.1.25.150.40.7012.ESD	1500 mm	400 mm		
NS.1.25.150.40.7012	1500 mm	400 mm		
NS.1.25.150.40.7035.ESD	1500 mm	400 mm		
NS.1.25.150.40.7035	1500 mm	400 mm		
NS.1.25.180.40.7012.ESD	1800 mm	400 mm		
NS.1.25.180.40.7012	1800 mm	400 mm		
NS.1.25.180.40.7035.ESD	1800 mm	400 mm		
NS.1.25.180.40.7035	1800 mm	400 mm		

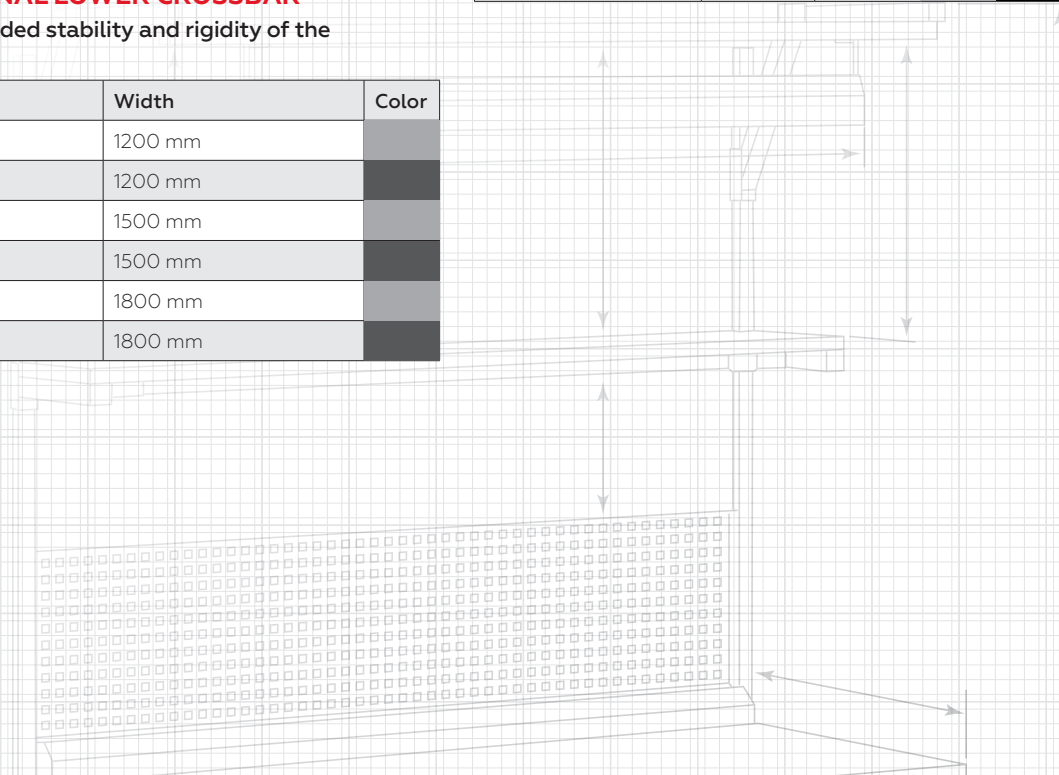



**2A. ADDITIONAL SHELF**

Requires Main shelf to be installed. Rear racks excluded.

Code	Shelf width	Wb depth	Color	Type
NS.1.26.120.30.7012.ESD	1200 mm	300 mm		
NS.1.26.120.30.7012	1200 mm	300 mm		
NS.1.26.120.30.7035.ESD	1200 mm	300 mm		
NS.1.26.120.30.7035	1200 mm	300 mm		
NS.1.26.150.30.7012.ESD	1500 mm	300 mm		
NS.1.26.150.30.7012	1500 mm	300 mm		
NS.1.26.150.30.7035.ESD	1500 mm	300 mm		
NS.1.26.150.30.7035	1500 mm	300 mm		
NS.1.26.180.30.7012.ESD	1800 mm	300 mm		
NS.1.26.180.30.7012	1800 mm	300 mm		
NS.1.26.180.30.7035.ESD	1800 mm	300 mm		
NS.1.26.180.30.7035	1800 mm	300 mm		
NS.1.26.120.40.7012.ESD	1200 mm	400 mm		
NS.1.26.120.40.7012	1200 mm	400 mm		
NS.1.26.120.40.7035.ESD	1200 mm	400 mm		
NS.1.26.120.40.7035	1200 mm	400 mm		
NS.1.26.150.40.7012.ESD	1500 mm	400 mm		
NS.1.26.150.40.7012	1500 mm	400 mm		
NS.1.26.150.40.7035.ESD	1500 mm	400 mm		
NS.1.26.150.40.7035	1500 mm	400 mm		
NS.1.26.180.40.7012.ESD	1800 mm	400 mm		
NS.1.26.180.40.7012	1800 mm	400 mm		
NS.1.26.180.40.7035.ESD	1800 mm	400 mm		
NS.1.26.180.40.7035	1800 mm	400 mm		

**3. POWER PANEL**

**3A. 1/2 POWER PANEL**

An aluminum case/half-size case with four sockets, protective contact, switch and 3 m cable. Nominal load capacity: 10 A

Available with sockets matching all standards specific to Germany, UK, Czech republic, Switzerland, Italy, Israel and other countries on request.

**4. ZR WORKBENCH LED LIGHTING**

An aluminum case with LED lamp and light direction regulation. Color temperature 4700-5300 K Provides at least 1200-lux illuminance at 1000 mm distance from the light source.

Code	Width	Color
NS.1.15.120.7012	1200 mm	
NS.1.15.120.7035	1200 mm	
NS.1.15.150.7012	1500 mm	
NS.1.15.150.7035	1500 mm	
NS.1.15.180.7012	1800 mm	
NS.1.15.180.7035	1800 mm	

**4B. UNDER-SHELF LOCAL LIGHTING**

Additional lighting can be mounted under the main shelf or attached to perforated panel. Provides at least 1000-lux illuminance at 1000 mm distance from the light source.

Code	Lighting width	Dimmer
NS.1.11	600 mm	-
NS.1.12	900 mm	-
NS.1.17	600 mm	+
NS.1.18	900 mm	+

**5. MIDDLE UPRIGHT FOR ALL ITEMS REQUIRED TO HOLD ANY 1/2 ITEM**


Three sizes to match standard workbench width.

Code	Wb width	Color
NS.3.5.120.7012	1200 mm	
NS.3.5.120.7035	1200 mm	
NS.3.5.150.7012	1500 mm	
NS.3.5.150.7035	1500 mm	
NS.3.5.180.7012	1800 mm	
NS.3.5.180.7035	1800 mm	

**6. BIN RAIL**

Aluminum rail for bin storage placed along workbench length.

Code	Wb width	Color	Size
NS.2.31.120.7012	1200 mm		full
NS.2.31.120.7035	1200 mm		full
NS.2.31.150.7012	1500 mm		full
NS.2.31.150.7035	1500 mm		full
NS.2.31.180.7012	1800 mm		full
NS.2.31.180.7035	1800 mm		full

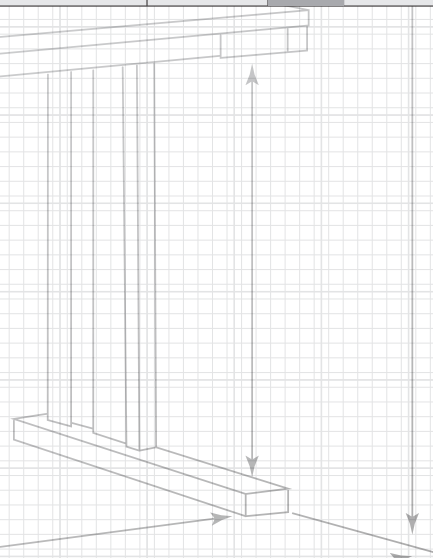

**6A. ½ BIN RAIL**

Aluminum rail for bin storage placed along workbench length.

Code	Wb width	Color	Size
NS.2.33.120.7012	1200 mm		Half-size
NS.2.33.120.7035	1200 mm		Half-size
NS.2.33.150.7012	1500 mm		Half-size
NS.2.33.150.7035	1500 mm		Half-size
NS.2.33.180.7012	1800 mm		Half-size
NS.2.33.180.7035	1800 mm		Half-size

**7. PERFORATED PANEL**

Panel can be equipped with different holders for additional equipment and tools storage.

Code	Wb width	Color	Size
NS.3.6.120.7012	1200 mm		full
NS.3.6.120.7035	1200 mm		full
NS.3.6.150.7012	1500 mm		full
NS.3.6.150.7035	1500 mm		full
NS.3.6.180.7012	1800 mm		full
NS.3.6.180.7035	1800 mm		full

**7A. ½ PERFORATED PANEL**

Panel can be equipped with different holders for additional equipment and tools storage.

Code	Wb width	Color	Size
NS.3.7.120.7012	1200 mm		Half-size
NS.3.7.120.7035	1200 mm		Half-size
NS.3.7.150.7012	1500 mm		Half-size
NS.3.7.150.7035	1500 mm		Half-size
NS.3.7.180.7012	1800 mm		Half-size
NS.3.7.180.7035	1800 mm		Half-size

**7B. PERFORATED PANEL V.2**

Perforated panel v.2 with 38 mm feed pitch. Panel can be equipped with different holders for additional equipment and tools storage.

Code	Wb width	Color	Size
NS.3.9.120.7035.EU	1200 mm		Full-size
NS.3.9.150.7035.EU	1500 mm		Full-size
NS.3.9.180.7035.EU	1800 mm		Full-size
NS.3.9.120.7012.EU	1200 mm		Full-size
NS.3.9.150.7012.EU	1500 mm		Full-size
NS.3.9.180.7012.EU	1800 mm		Full-size
NS.3.10.120.7035.EU	1200 mm		Half-size
NS.3.10.150.7035.EU	1500 mm		Half-size
NS.3.10.180.7035.EU	1800 mm		Half-size
NS.3.10.120.7012.EU	1200 mm		Half-size
NS.3.10.150.7012.EU	1500 mm		Half-size
NS.3.10.180.7012.EU	1800 mm		Half-size

**8. FULL-SIZED SLOPED SHELF**

Sloped shelf with 10-55° angle adjustment provides comfortable monitoring of work equipment .

Code	Width	Size	Type	Color
NS.1.37.120.7012.ESD	1200 mm	Full-size		
NS.1.37.120.7012	1200 mm	Full-size		
NS.1.37.120.7035.ESD	1200 mm	Full-size		
NS.1.37.120.7035	1200 mm	Full-size		
NS.1.37.150.7012.ESD	1500 mm	Full-size		
NS.1.37.150.7012	1500 mm	Full-size		
NS.1.37.150.7035.ESD	1500 mm	Full-size		
NS.1.37.150.7035	1500 mm	Full-size		
NS.1.37.180.7012.ESD	1800 mm	Full-size		
NS.1.37.180.7012	1800 mm	Full-size		
NS.1.37.180.7035.ESD	1800 mm	Full-size		
NS.1.37.180.7035	1800 mm	Full-size		

**8A. HALF-SIZED SLOPED SHELF**

Sloped shelf with 10-55° angle adjustment provides comfortable monitoring of work equipment .

Code	Width	Size	Type	Color
NS.1.36.120.7012.ESD	1200 mm	Half-size		
NS.1.36.120.7012	1200 mm	Half-size		
NS.1.36.120.7035.ESD	1200 mm	Half-size		
NS.1.36.120.7035	1200 mm	Half-size		
NS.1.36.150.7012.ESD	1500 mm	Half-size		
NS.1.36.150.7012	1500 mm	Half-size		
NS.1.36.150.7035.ESD	1500 mm	Half-size		
NS.1.36.150.7035	1500 mm	Half-size		
NS.1.36.180.7012.ESD	1800 mm	Half-size		
NS.1.36.180.7012	1800 mm	Half-size		
NS.1.36.180.7035.ESD	1800 mm	Half-size		
NS.1.36.180.7035	1800 mm	Half-size		

**9. CANTILEVER**

Cantilever for fastening drawings, additional lighting and instruments.

Code	Width	Color
NS.4.41.120.7012	1200 mm	
NS.4.41.120.7035	1200 mm	
NS.4.41.150.7012	1500 mm	
NS.4.41.150.7035	1500 mm	
NS.4.41.180.7012	1800 mm	
NS.4.41.180.7035	1800 mm	


**10, 10A. OPTIONAL DRAWER UNITS / OPTIONAL DRAWER UNITS WITH REDUCED DEPTH /**

Storage solution for tools and components. Those with reduced depth of 490mm allow for the installation of various additional equipment under the tabletop. The drawer unit can be placed on either the left or right side.

Code	Quantity of drawers	Depth	type	Color
NS.16.27.7012.ESD	3	full		
NS.16.27.7012	3	full		
NS.16.27.7035.ESD	3	full		
NS.16.27.7035	3	full		
NS.16.28.7012.ESD	2	full		
NS.16.28.7012	2	full		
NS.16.28.7035.ESD	2	full		
NS.16.28.7035	2	full		
NS.16.29.7012.ESD	3	reduced		
NS.16.29.7012	3	reduced		
NS.16.29.7035.ESD	3	reduced		
NS.16.29.7035	3	reduced		
NS.16.30.7012.ESD	2	reduced		
NS.16.30.7012	2	reduced		
NS.16.30.7035.ESD	2	reduced		
NS.16.30.7035	2	reduced		


**CORNER CONNECTING WORKBENCHES**

s. ARGENTUM section

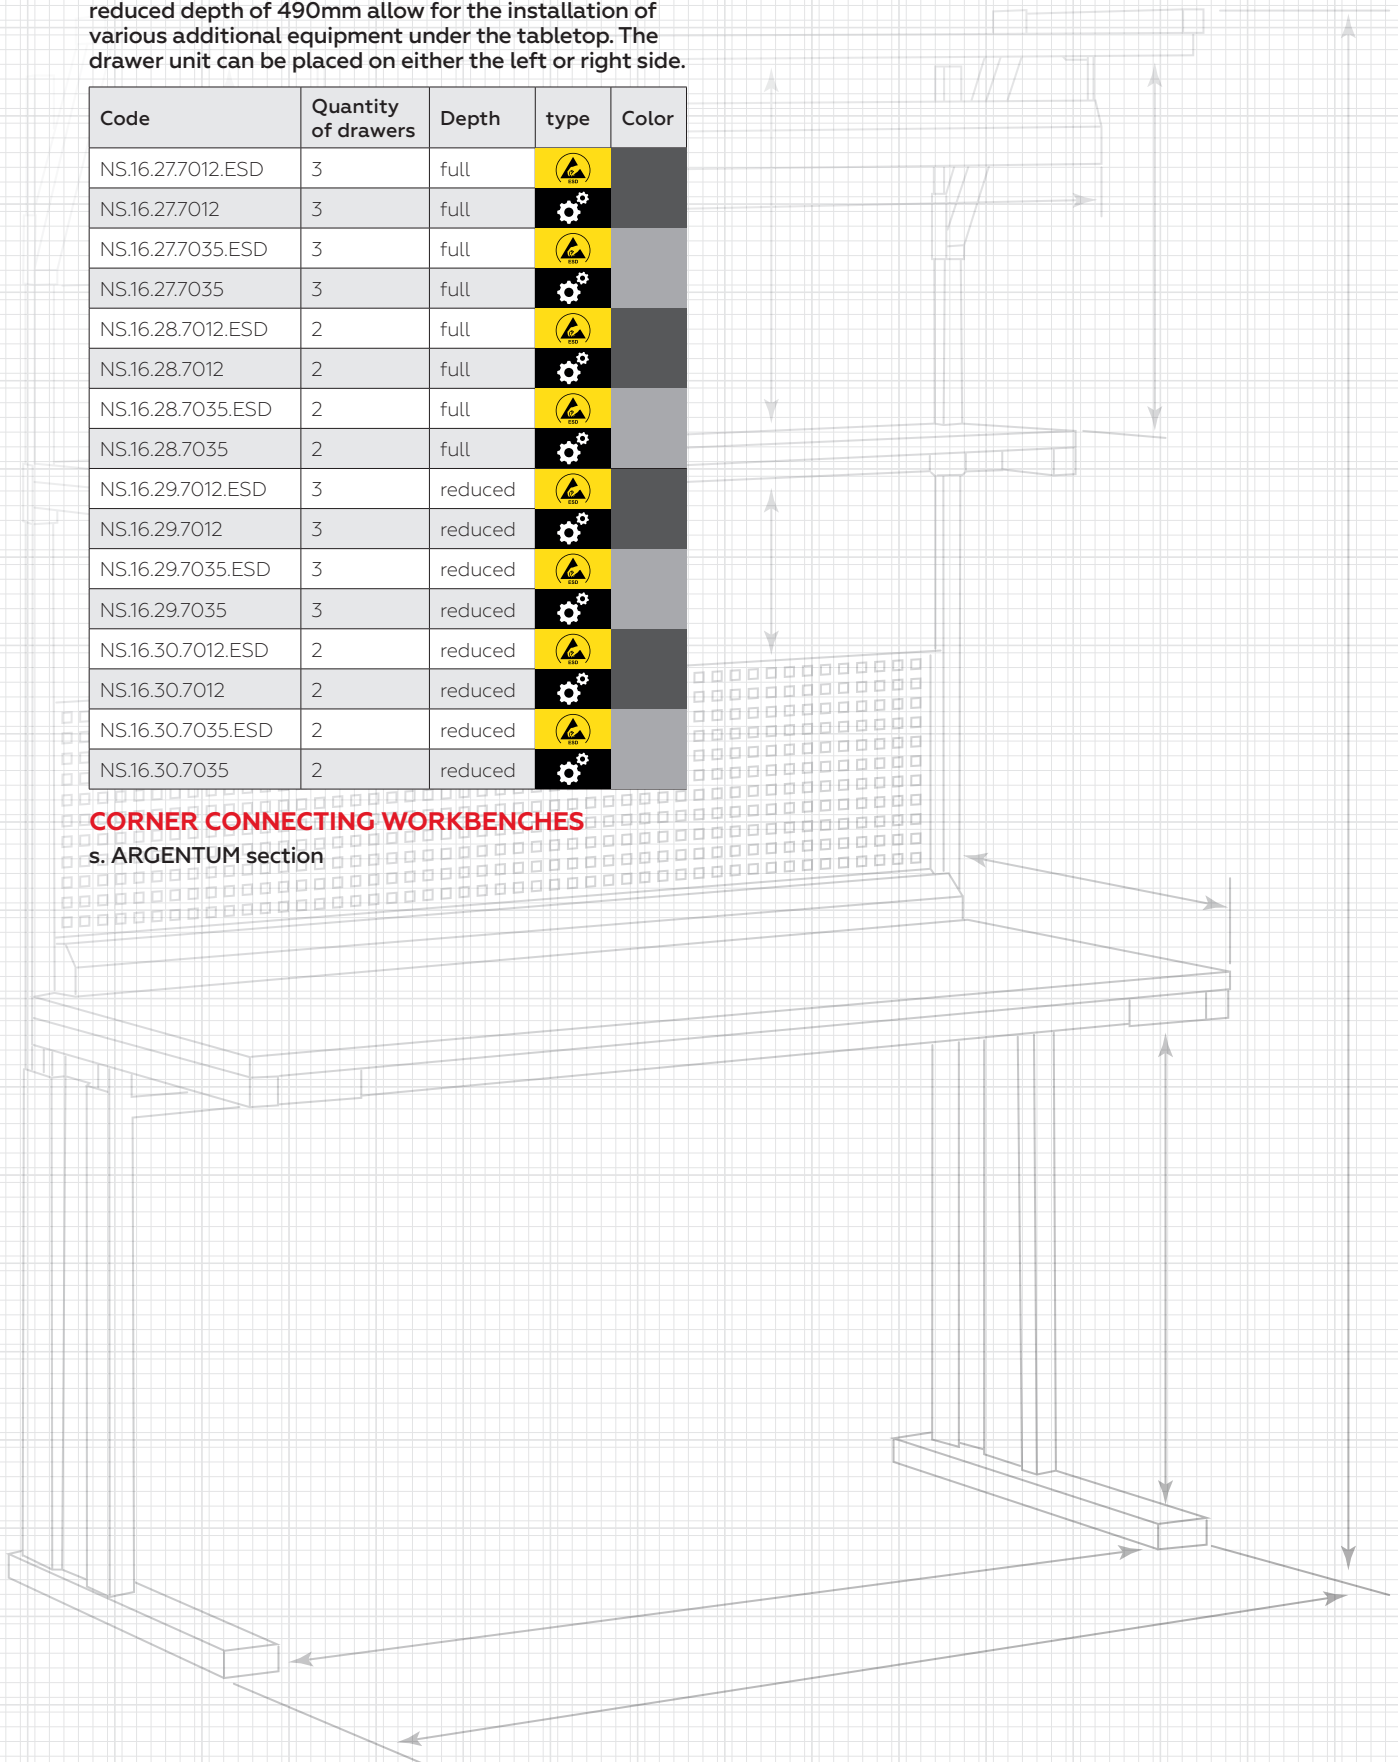

# AG B AND AG C BASIC WORKBENCHES

## AG B ARGENTUM BASIC WORKBENCHES

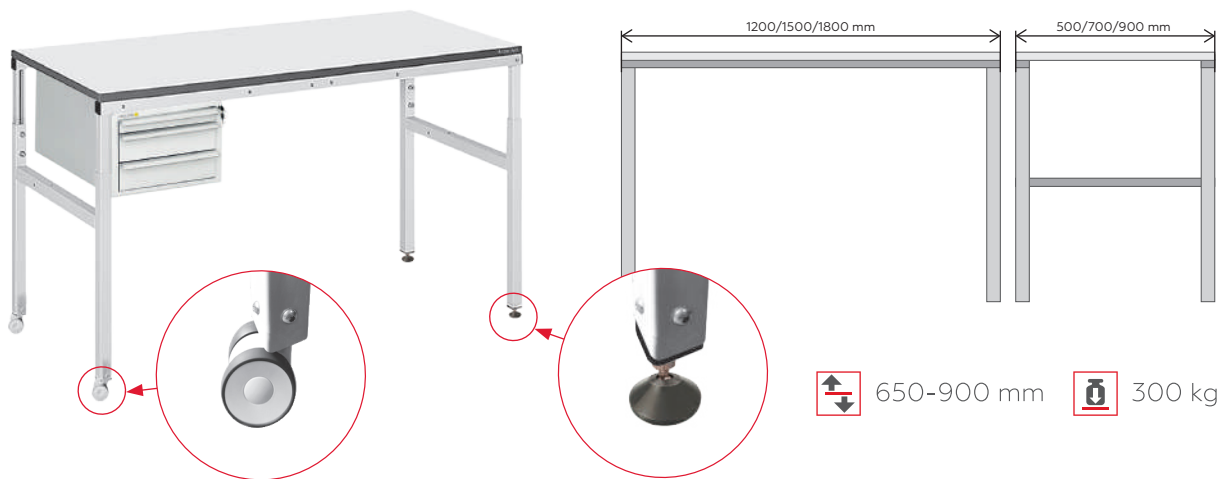

## AG C ARGENTUM C MOVABLE COMPUTER EQUIPMENT WORKBENCH



AG B ARGENTUM BASIC WORKBENCHES do not allow any upper extension, but can be placed in a line with no gaps. 700 mm and 900 mm depth workbenches can be equipped with any type of optional drawer units and additional swivel or casters supports. They can be complemented by ARGENTUM corner connecting workbenches.

When placing an order, please choose either the ESD or technical version, and the colour, either dark grey RAL 7012 or light grey RAL 7035.

**1. ARGENTUM BASIC WORKBENCH**

Code	Width	Depth	Color	Type
NS.5.10.120.50.7012.ESD	1200 mm	500 mm		
NS.5.10.120.50.7035.ESD	1200 mm	500 mm		
NS.5.10.120.50.7012	1200 mm	500 mm		
NS.5.10.120.50.7035	1200 mm	500 mm		
NS.5.10.150.50.7012.ESD	1500 mm	500 mm		
NS.5.10.150.50.7035.ESD	1500 mm	500 mm		
NS.5.10.150.50.7012	1500 mm	500 mm		
NS.5.10.150.50.7035	1500 mm	500 mm		
NS.5.10.180.50.7012.ESD	1800 mm	500 mm		
NS.5.10.180.50.7035.ESD	1800 mm	500 mm		
NS.5.10.180.50.7012	1800 mm	500 mm		
NS.5.10.180.50.7035	1800 mm	500 mm		
NS.5.11.120.70.7012.ESD	1200 mm	700 mm		
NS.5.11.120.70.7035.ESD	1200 mm	700 mm		
NS.5.11.120.70.7012	1200 mm	700 mm		
NS.5.11.120.70.7035	1200 mm	700 mm		
NS.5.11.150.70.7012.ESD	1500 mm	700 mm		
NS.5.11.150.70.7035.ESD	1500 mm	700 mm		
NS.5.11.150.70.7012	1500 mm	700 mm		
NS.5.11.150.70.7035	1500 mm	700 mm		
NS.5.11.180.70.7012.ESD	1800 mm	700 mm		
NS.5.11.180.70.7035.ESD	1800 mm	700 mm		
NS.5.11.180.70.7012	1800 mm	700 mm		
NS.5.11.180.70.7035	1800 mm	700 mm		
NS.5.12.120.90.7012.ESD	1200 mm	900 mm		
NS.5.12.120.90.7035.ESD	1200 mm	900 mm		
NS.5.12.120.90.7012	1200 mm	900 mm		
NS.5.12.120.90.7035	1200 mm	900 mm		
NS.5.12.150.90.7012.ESD	1500 mm	900 mm		
NS.5.12.150.90.7035.ESD	1500 mm	900 mm		
NS.5.12.150.90.7012	1500 mm	900 mm		
NS.5.12.150.90.7035	1500 mm	900 mm		
NS.5.12.180.90.7012.ESD	1800 mm	900 mm		
NS.5.12.180.90.7035.ESD	1800 mm	900 mm		
NS.5.12.180.90.7012	1800 mm	900 mm		
NS.5.12.180.90.7035	1800 mm	900 mm		

**2. 2A. OPTIONAL DRAWER UNITS WITH REDUCED DEPTH**

Storage solution for tools and components, no place on floor required. Those with reduced depth of 490 mm allow for the installation of various additional equipment under the tabletop. The drawer unit can be placed on either the left or right side.

Code	Quantity of drawers	Depth	Color	Type
NS.16.27.7012.ESD	3	full		
NS.16.27.7012	3	full		
NS.16.27.7035.ESD	3	full		
NS.16.27.7035	3	full		
NS.16.28.7012.ESD	2	full		
NS.16.28.7012	2	full		
NS.16.28.7035.ESD	2	full		
NS.16.28.7035	2	full		
NS.16.29.7012.ESD	3	reduced		
NS.16.29.7012	3	reduced		
NS.16.29.7035.ESD	3	reduced		
NS.16.29.7035	3	reduced		
NS.16.30.7012.ESD	2	reduced		
NS.16.30.7012	2	reduced		
NS.16.30.7035.ESD	2	reduced		
NS.16.30.7035	2	reduced		

**3. ADDITIONAL SWIVEL AND CASTERS SUPPORTS**

Supports require connecting plug installation.

Code	Item	Type
NS.1.40	Connecting plug	
NS.1.40.ESD	Connecting plug	
NS.1.41	Swivel supports	For both versions
NS.1.42	Argentum Basic series hinged supports	For both versions
NS.1.53.ESD	Castors	
NS.1.53	Castors	

AG C ARGENTUM C MOVABLE COMPUTER EQUIPMENT WORKBENCH. Space-saving movable workbench for computer and measurement equipment storage and transportation. The movable workbench is equipped with four 75 mm casters, two of which have brakes and keyboard support.

Code	Color	Type
NS.5.8.90.70.7012.ESD		
NS.5.8.90.70.7035.ESD		
NS.5.8.90.70.7012		
NS.5.8.90.70.7035		

Power panel NS.4.8 can be additionally installed

# DRAWER UNITS

## SUSPENDED, MOVABLE AND STATIONARY DRAWER UNITS

Steel frame drawer units are designed for tools and components storage. Movable and stationary drawer units can also be used as additional workplaces. Steel frame drawer units are equipped with central lock and either 550 mm telescoping drawers or shelves. Movable units have four rubber casters, two of which have brakes. We also offer suspended drawer units with a reduced 490mm depth, which allows for the installation of various additional equipment under the tabletop.

Drawers' inner dimensions for different types are:





- A – standard 400×45×505 mm
- B – standard 400×100×505 mm
- C – standard 400×160×505 mm
- D – standard 400×200×505 mm


Reduced drawers:


- a – reduced 400×45×426 mm
- b – reduced 400×100×426 mm

 per drawer 30 kg



Color	Type	1	2	3	4	5	6
Black		NS.16.27.7012.ESD	NS.16.28.7012.ESD	NS.16.29.7012.ESD	NS.16.30.7012.ESD	NS.16.31.7012.ESD	NS.16.32.7012.ESD
		NS.16.27.7012	NS.16.28.7012	NS.16.29.7012	NS.16.30.7012	NS.16.31.7012	NS.16.32.7012
Grey		NS.16.27.7035.ESD	NS.16.28.7035.ESD	NS.16.29.7035.ESD	NS.16.30.7035.ESD	NS.16.31.7035.ESD	NS.16.32.7035.ESD
		NS.16.27.7035	NS.16.28.7035	NS.16.29.7035	NS.16.30.7035	NS.16.31.7035	NS.16.32.7035

Color	Type	7	8	9	10
Black		NS.16.35.00.ESD	NS.16.36.00.ESD	NS.16.33.ESD	NS.16.34.ESD
		NS.16.35.00	NS.16.36.00	NS.16.33	NS.16.34

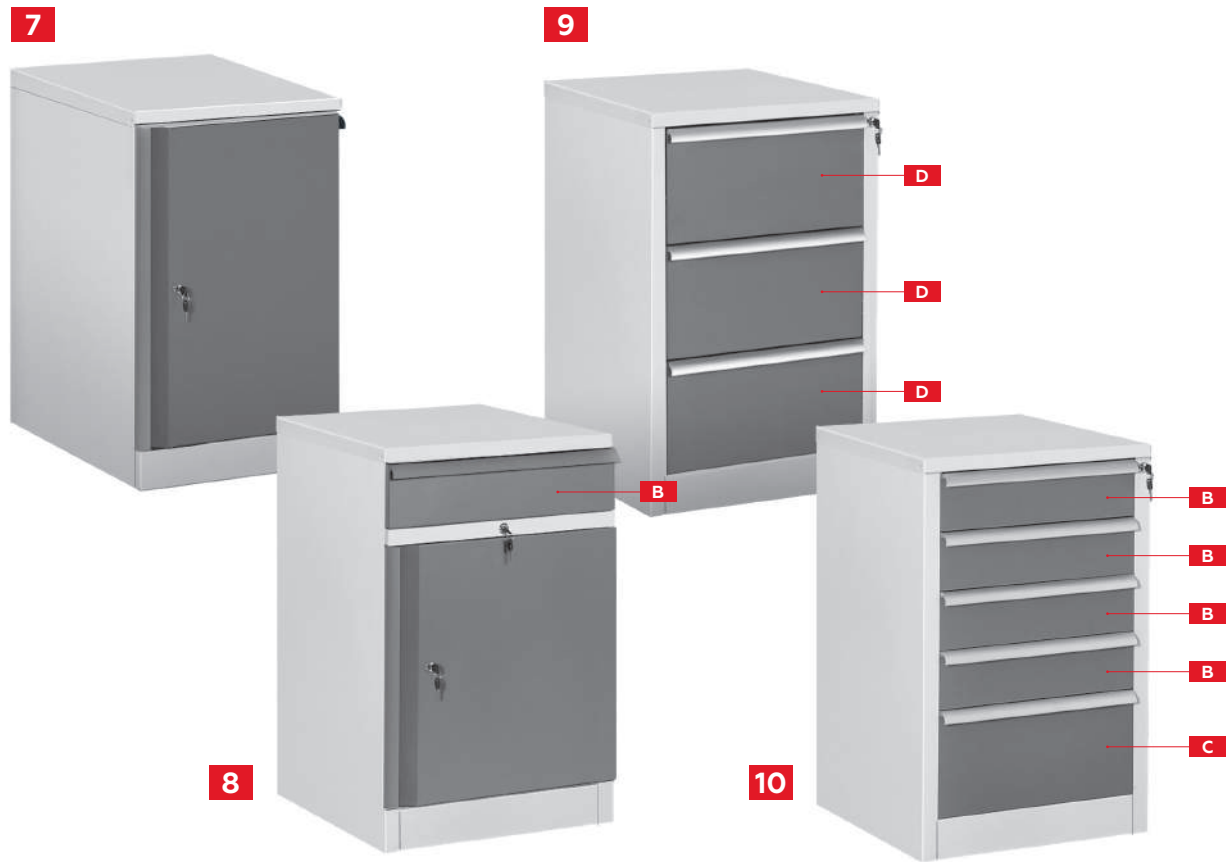

Drawer units		Suspended				Movable	
Picture number		1	2	3	4	5	6
Dimensions (W×H×D), mm		490×354×605	490×233×605	490×354×490	490×233×490	490×580×610	490×650×635
Quantity of drawers		3	2	3	2	3	4
Drawers per unit	A	1	1	–	–	–	1
	B	2	1	–	–	2	2
	C	–	–	–	–	1	1
	a	–	–	1	1	–	–
	b	–	–	2	1	–	–
Weight (kg)		20	15	17	12	25	32

Drawer units		Stationary			
Picture number		7	8	9	10
Dimensions (W×H×D), mm		500×800×590 mm	500×800×590 mm	500×800×590 mm	500×800×590 mm
Quantity of drawers		2 shelves	1 drawer, 1 shelf	3 drawers	5 drawers
Drawers per unit	B	–	1	–	4
	C	–	–	–	1
		–	–	3	–
Weight (kg)		25	30	35	40

# MOVABLE TABLES

Movable tables are used for tools and components storage and transportation. All movable tables are equipped with four 75 mm casters, two of which are with brakes.



1, 2, 3 650–890 mm



4 705–950 mm



3



5

Picture number	1	2	3	4
Load capacity per surface	150 kg			100 kg
Dimensions, WxD	710x515 mm	700x1000 mm	700x1500 mm	710x515 mm
Inner dimensions and usable area of upper shelf	515x710 mm	700x1000 mm	700x1500 mm	515x710 mm
Inner dimensions and usable area of lower shelf	410x710 mm	610x1000 mm	610x1500 mm	410x710 mm

When placing an order, please choose either the ESD or technical version, and the colour, either dark grey RAL 7012 or light grey RAL 7035.

Color	Type	1	2	3	4
Dark Grey		NS.15.7.71.51.7012.ESD	NS.15.9.70.100.7012.ESD	NS.15.10.70.150.7012.ESD	NS.15.8.71.51.7012.ESD
		NS.15.7.71.51.7012	NS.15.9.70.100.7012	NS.15.10.70.150.7012	NS.15.8.71.51.7012
Light Grey		NS.15.7.71.51.7035.ESD	NS.15.9.70.100.7035.ESD	NS.15.10.70.150.7035.ESD	NS.15.8.71.51.7035.ESD
		NS.15.7.71.51.7035	NS.15.9.70.100.7035	NS.15.10.70.150.7035	NS.15.8.71.51.7035

5	Code	Size	Type
	NS.11.41.51.70.ESD	515x700x780 mm	
	NS.11.41.51.70	515x700x780 mm	



# ADDITIONAL WORKPLACE EQUIPMENT



## POWER PANEL ACCESSORIES

Standard power panels can be equipped with a number of additional units:


Type	Code
Single sockets with grounding	NS.4.42
USB double charger socket	NS.4.11
Double RJ 45 socket cat. 6UTP	NS.4.43
RJ-11 Telephone Socket	NS.4.44
10 A automatic fuse	NS.4.45
16 A automatic fuse	NS.4.46
25 A automatic fuse	NS.4.47
Circuit breaker 16A/0.01A	NS.4.48
Circuit breaker 25A/0.01A	NS.4.49

Also available with sockets matching specific countries' standards: Germany, UK, Czech republic, Switzerland, Italy, Israel, etc.

## BIN RAIL NS.2.34.10.100

The aluminum rail can be installed on any available wall space to hold attached storage bins. Maximum length 3 m.

– Width 95 mm.



## REINFORCING BRACKET


A set of reinforcing brackets for main shelves of ARGENTUM, ZIRCONIUM and OSMIUM series workbenches. Helps to increase Main shelves load capacity up to 100 kg.

Type	Color
NS.1.33.7035	
NS.1.33.7012	

## UNDER-SHELF LOCAL LIGHTING

Additional lighting can be mounted under the main shelf or attached to a perforated panel. Suitable for any workbench equipped with upper modules. Angle adjustment  $\pm 60^\circ$  or  $80^\circ$  depending on the type of workbench.


Type	Lighting width	Dimmer
NS.1.11	600 mm	-
NS.1.12	900 mm	-
NS.1.17	600 mm	+
NS.1.18	900 mm	+

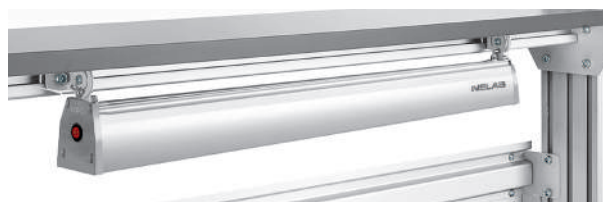

Lighting with dimmer



Lighting with button

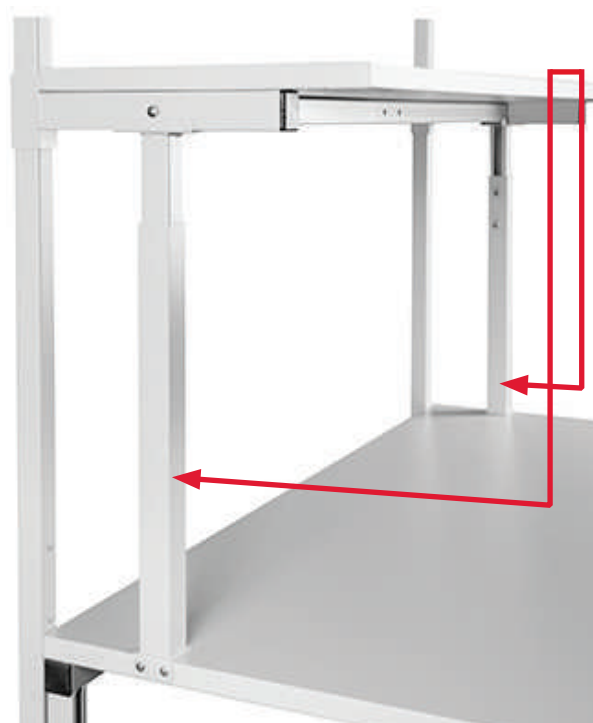

**REAR RACKS**


Type	Height	Color
NS.3.2.7012	Rear racks	
NS.3.2.7035	Rear racks	
NS.3.4.7012	Small rear racks	
NS.3.4.7035	Small rear racks	



**CABLE TIDY**

Additional module for cables and wires, can be attached at the backside of the table or under the tabletop. The length of one section is 550 mm, one can install several sections in a row.

Type	Size	Color
NS.3.29.55.7012	550 mm	
NS.3.29.55.7035	550 mm	

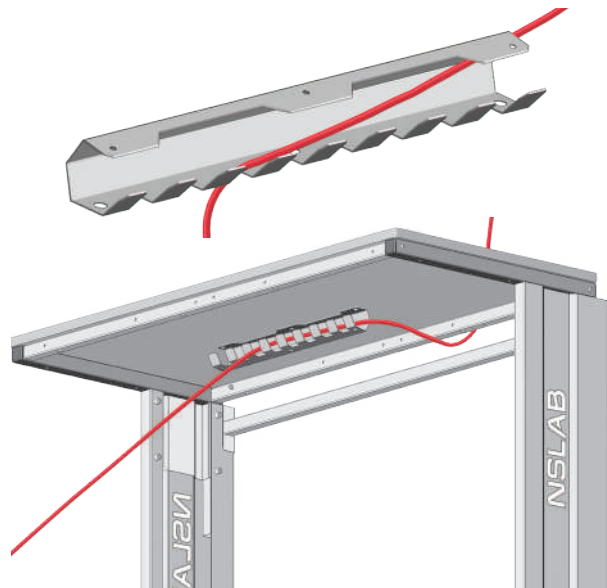

**PPS-01 MOVABLE COMPUTER CASE SUPPORT**

Computer support helps moving the computer case around the area.

Type	Size	Color
NS.2.19.22.48.7035	220x480x150 mm	
NS.2.19.22.48.7012	220x480x150 mm	



**METAL KEYBOARD SUPPORT**







Telescoping metal support saves space on the tabletop. Keyboard support is produced of powder coated steel and available in dark grey (RAL 7012) or lightgrey (RAL 7035) colors. Keyboard support can be mounted to any workbench series which has enough space under the tabletop (minimum of 615 mm width and 383 mm depth is required).







Type	Size	Color
NS.2.9.7035	616x135x383 mm	
NS.2.9.7012	616x135x383 mm	



**TRANSPORTATION CART**

Transportation carts are used for tools and components storage and transportation. Metal carts are equipped with four 75 mm or 125 mm casters, two of which are with brakes, and height adjustable shelves.

Type	Size	Type
NS.15.13.47.84.7035.ESD	470x990x840 mm	
NS.15.13.47.84.7013.ESD	470x990x840 mm	
NS.15.13.47.84.7035	470x990x840 mm	
NS.15.13.47.84.7012	470x990x840 mm	
NS.15.14.47.84.7035.ESD	470x990x840 mm	
NS.15.14.47.84.7014.ESD	470x990x840 mm	





Type	Size	Type
NS.15.14.47.84.7035	470x990x840 mm	
NS.15.14.47.84.7012	470x990x840 mm	
NS.15.15.61.127.7035.ESD	615x1570x1275 mm	
NS.15.15.61.127.7015.ESD	615x1570x1275 mm	
NS.15.15.61.127.7035	615x1570x1275 mm	
NS.15.15.61.127.7012	615x1570x1275 mm	



# CABINETS AND WARDROBES









All cabinets have a central lock. Filing and combined cabinets have three or four height adjustable shelves with 50 mm pitches. For wardrobe and combined cabinets, a garment bar is included.



Filing cabinets			
Picture	1a		1b
Outer dimensions, cm	1000x1950x550	820x1850x450	820x1000x450
Inner dimensions, cm	929x1793x484	749x1693x384	748x843x384
Weight, kg	80	62	40
	 NS.22.1.100.55.7012.ESD	NS.22.2.82.45.7012.ESD	NS.22.3.82.45.7012.ESD
	 NS.22.1.100.55.7012	NS.22.2.82.45.7012	NS.22.3.82.45.7012
	 NS.22.1.100.55.7035.ESD	NS.22.2.82.45.7035.ESD	NS.22.3.82.45.7035.ESD
	 NS.22.1.100.55.7035	NS.22.2.82.45.7035	NS.22.3.82.45.7035





## ADDITIONAL SHELVES

Additional shelves for cabinets and shelving.

Type	To be used for	Color	Type
NS.14.9.7035.ESD	Additional shelf for cabinets NS.22.1, NS.14.6, NS.14.8		
NS.14.9.7012.ESD	Additional shelf for cabinets NS.22.1, NS.14.6, NS.14.8		
NS.14.10.7035.ESD	Additional shelf for cabinets NS.22.2, NS.22.3, NS.14.4, NS.14.5, NS.14.7		
NS.14.10.7012.ESD	Additional shelf for cabinets NS.22.2, NS.22.3, NS.14.4, NS.14.5, NS.14.7		




 per surface — 30 kg

	Wardrobe cabinets		Combined cabinets	
Picture	2		3	
Outer dimensions, cm	1000x1950x550	820x1850x450	1000x1950x550	820x1850x450
Inner dimensions, cm	928x1793x484	748x1693x384	928x1792x484	748x1691x384
Weight, kg	68	52	78	58
	NS.22.7.100.55.7012.ESD	NS.22.8.82.45.7012.ESD	NS.22.5.100.55.7012.ESD	NS.22.6.82.45.7012.ESD
	NS.22.7.100.55.7012	NS.22.8.82.45.7012	NS.22.5.100.55.7012	NS.22.6.82.45.7012
	NS.22.7.100.55.7035.ESD	NS.22.8.82.45.7035.ESD	NS.22.5.100.55.7035.ESD	NS.22.6.82.45.7035.ESD
	NS.22.7.100.55.7035	NS.22.8.82.45.7035	NS.22.5.100.55.7035	NS.22.6.82.45.7035





# NSLAB

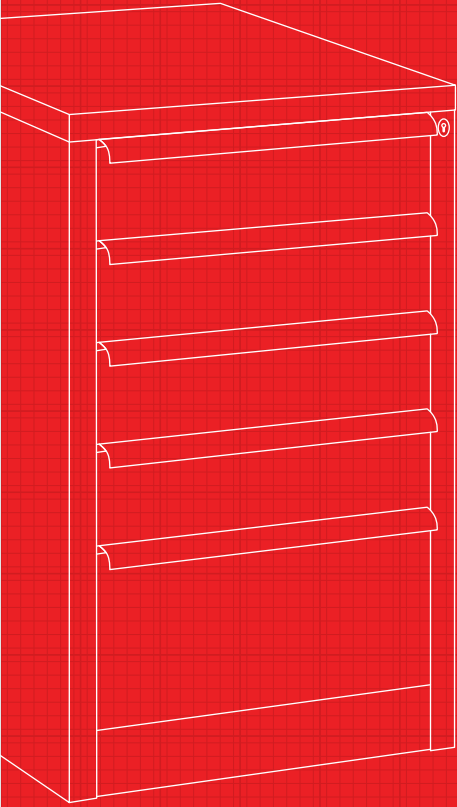

Production site:

Selimpaşa Mah. 6093 sokak. No: 56/3, Silivri -İstanbul-Türkiye

Sales office:

Küçükbakkalköy, Ali Ay Sk. No:19, 34750 Ataşehir/İstanbul



Phone: +90 212 731 55 55



nslabtech.com